



# PRODUCT SUBMITTAL



## # 2407 Adjustable Veneer Anchor

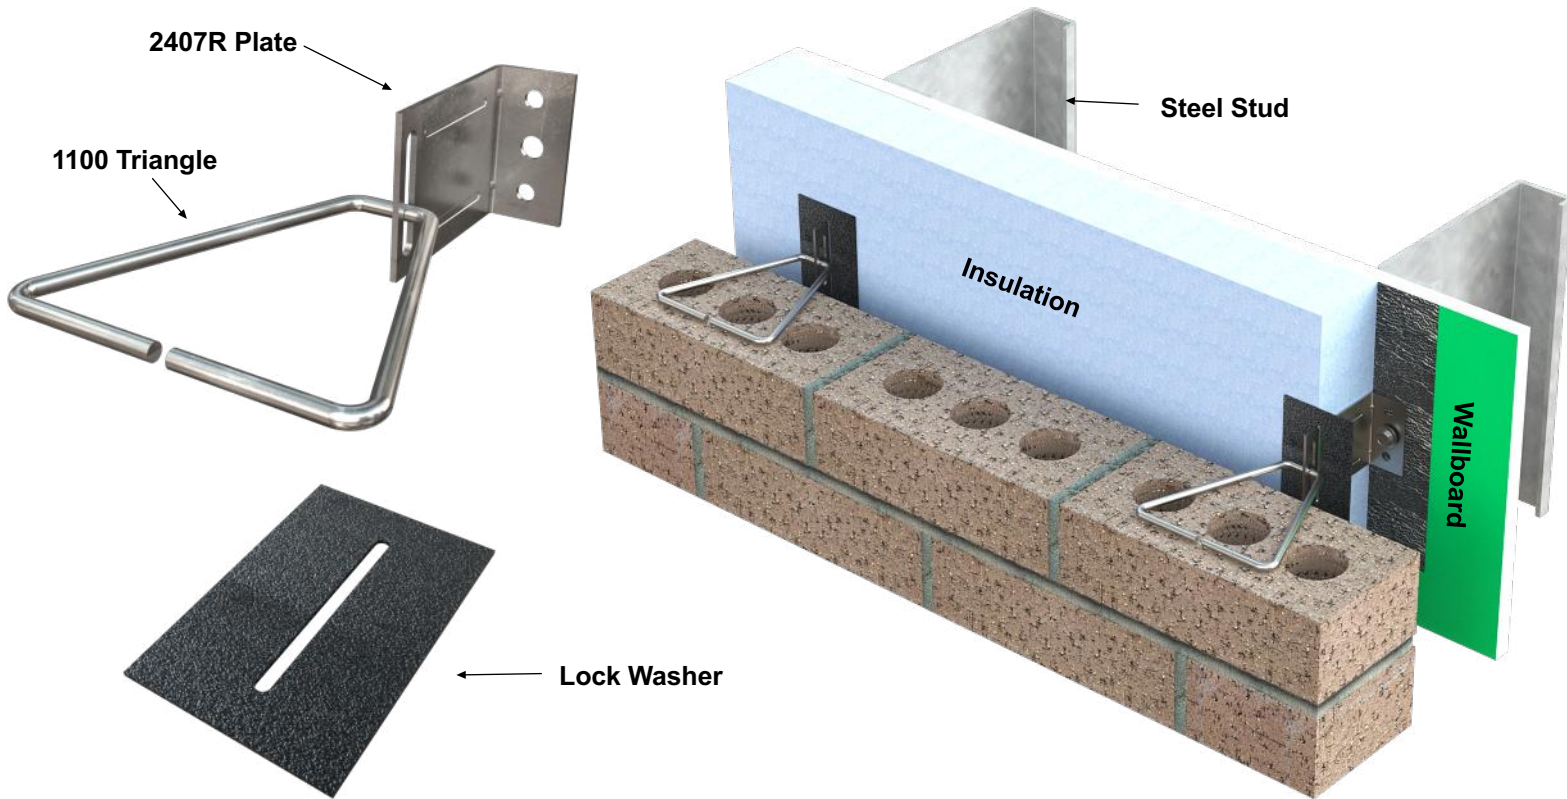

MATERIAL CONFORMANCE	SIZES / FINISHES		
<p><b>ASTM A1064/A1064M, ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b> Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b> Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p> <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p><b># 1100 Triangle Diameter:</b></p> <p>3/16" dia.    1/4" dia.</p>	<p><b># 1100 Triangle Size:</b></p> <p>3" x 3"            6" x 6" 4" x 4"            7" x 7" 5" x 5"            7" x 9"</p>	
	<p><b># 2407R Plate:</b></p> <p>16 gauge            14 gauge 12 gauge</p>		
	<p><b># 2407R Plate Length to accommodate insulation:</b></p> <p>0" insulation            2" insulation            3-1/2" insulation 1" insulation            2-1/2" insulation            4" insulation 1-1/2" insulation            3" insulation            Other _____</p>		
	<p><b>Finish:</b></p> <p>Hot Dip Galvanized            Stainless Steel</p>		

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113