


# PRODUCT SUBMITTAL



## BOND - N - FLASH S.A.

Self-Adhering 304 Stainless Steel Flashing

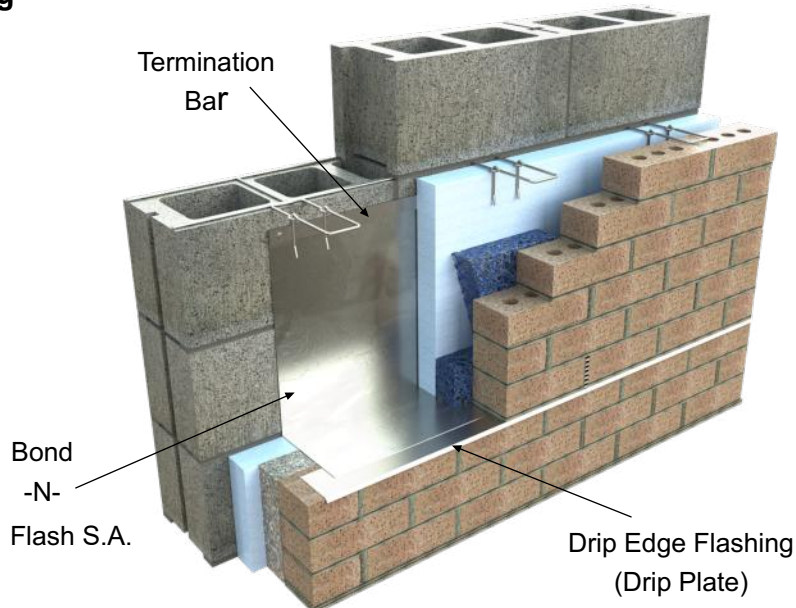

**Description:**

BOND-N-FLASH S.A. stainless steel composite flashing consists of 2 mils of stainless steel (type 304) bonded to a permanent clear (PSA) adhesive with a removable silicone coated release liner. BOND-N-FLASH S.A. is a self-adhering flashing which can be applied from 20 Degrees F to 180 Degrees F. When necessary, BOND-N-FLASH S.A. is to be applied a part of a system using both BOND-N-FLASH Primer and BOND-N-FLASH Mastic.

**Technical Data:**

Property	Avg. Values	Test Method
Puncture	2,500 psi	ASTM E154
Tensile Strength	100,000 pas	ASTM D882
Fire Resistance	Class A, Pass	ASTM E84
Mold Resistance	Pass	ASTM 3273
Adhesion	20 lbs/psi	PSTC - 1.1
Stainless Steel certified to meet:		ASTM A240/A240M

**Features and Benefits:**

- 304 Stainless Steel
- Permanent Adhesive
- Permanent UV Resistance
- Fire Resistant
- Mold Resistance
- High Puncture and Tear Resistance
- Flexible for easy job site formation
- 25 Year Warranty

**Applications:**

- Thru-Wall Flashing
- Head and Sill Flashing
- Spandrel Flashing
- Roof-Parapet Flashing
- Perimeter Flashing-Curtain Wall
- Base Flashing
- Transition Membrane ( Waterproofing, Roofing, Air Barriers )

**LEED – EA credit 1 and EQ credit 4.1**

BOND-N-FLASH S.A. is compatible with most of the insulations, air barriers, roofing membranes, asphaltic flashings and below grade waterproofing products.

**Weight:** 2 mils of stainless steel (type 304) bonded to a permanent clear (PSA) adhesive with a removable silicone coated release liner.

**Width:** ( 75 lf rolls )

12"                      18"                      24"                      36"

**BOND -N- FLASH Primer - Water Based**

5 gallon pail                      30 oz. cartridge

**BOND -N- FLASH Mastic**

5 gallon pail                      30 oz. cartridge

**BOND -N- FLASH Primer - Solvent Based ( Winter Grade )**

4 gallon pail                      30 oz. cartridge

**Termination Bar:**

Stainless Steel ( Type 304 )

PVC

**#4165 Drip Edge Flashing:** 26 gauge Stainless Steel x 8 - 0' ( Drip Plate )

1-1/2" width

3" width

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113