


PRODUCT SUBMITTAL



BOND - N - FLASH 304 Stainless Steel Flashing

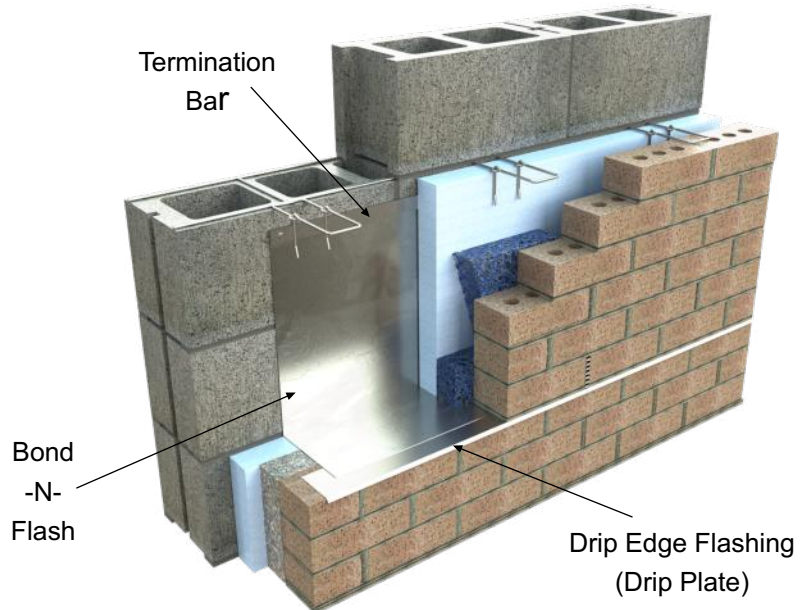

Description:

BOND-N-FLASH stainless steel composite flashing consists of 2 mils of stainless steel (type 304) bonded on one side to a permanent woven film fabric. BOND-N-FLASH Mastic is used to seal all seams and laps.

Technical Data:

Property	Avg. Values	Test Method
Puncture	2,500 psi	ASTM E154
Tensile Strength	100,000 pas	ASTM D882
Fire Resistance	Class A, Pass	ASTM E84
Mold Resistance	Pass	ASTM 3273
Stainless Steel certified to meet:		ASTM A240/A240M

Features and Benefits:

- 304 Stainless Steel
- Permanent UV Resistance
- Fire Resistant
- Mold Resistance
- High Puncture and Tear Resistance
- Flexible for easy job site formation
- Warrantied

Applications:

- Thru-Wall Flashing
- Head and Sill Flashing
- Spandrel Flashing
- Roof-Parapet Flashing
- Perimeter Flashing-Curtain Wall
- Base Flashing
- Transition Membrane (Waterproofing, Roofing, Air Barriers)

LEED – EA credit 1 and EQ credit 4.1

BOND-N-FLASH is compatible with air barriers, insulation boards, spray polyurethane foam, roofing membranes, asphaltic flashings, and below grade waterproofing products. Can be used with limestone since it is non-staining.

Weight: 2 mils of stainless steel (type 304) bonded on one side to a permanent woven film fabric.

Width: (75 lf rolls)

12" 16" 18" 24" 36"

BOND -N- FLASH Primer - Water Based

5 gallon pail 30 oz. cartridge

BOND -N- FLASH Mastic

5 gallon pail 30 oz. cartridge

BOND -N- FLASH Primer - Solvent Based (Winter Grade)

5 gallon pail 30 oz. cartridge

Termination Bar:

Stainless Steel (Type 304)

PVC

#4165 Drip Edge Flashing: 26 gauge Stainless Steel x 8 - 0' (Drip Plate)

1-1/2" width

3" width

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113