


PRODUCT SUBMITTAL

WIRE-BOND

1422 Channel Slot Anchor Seismic

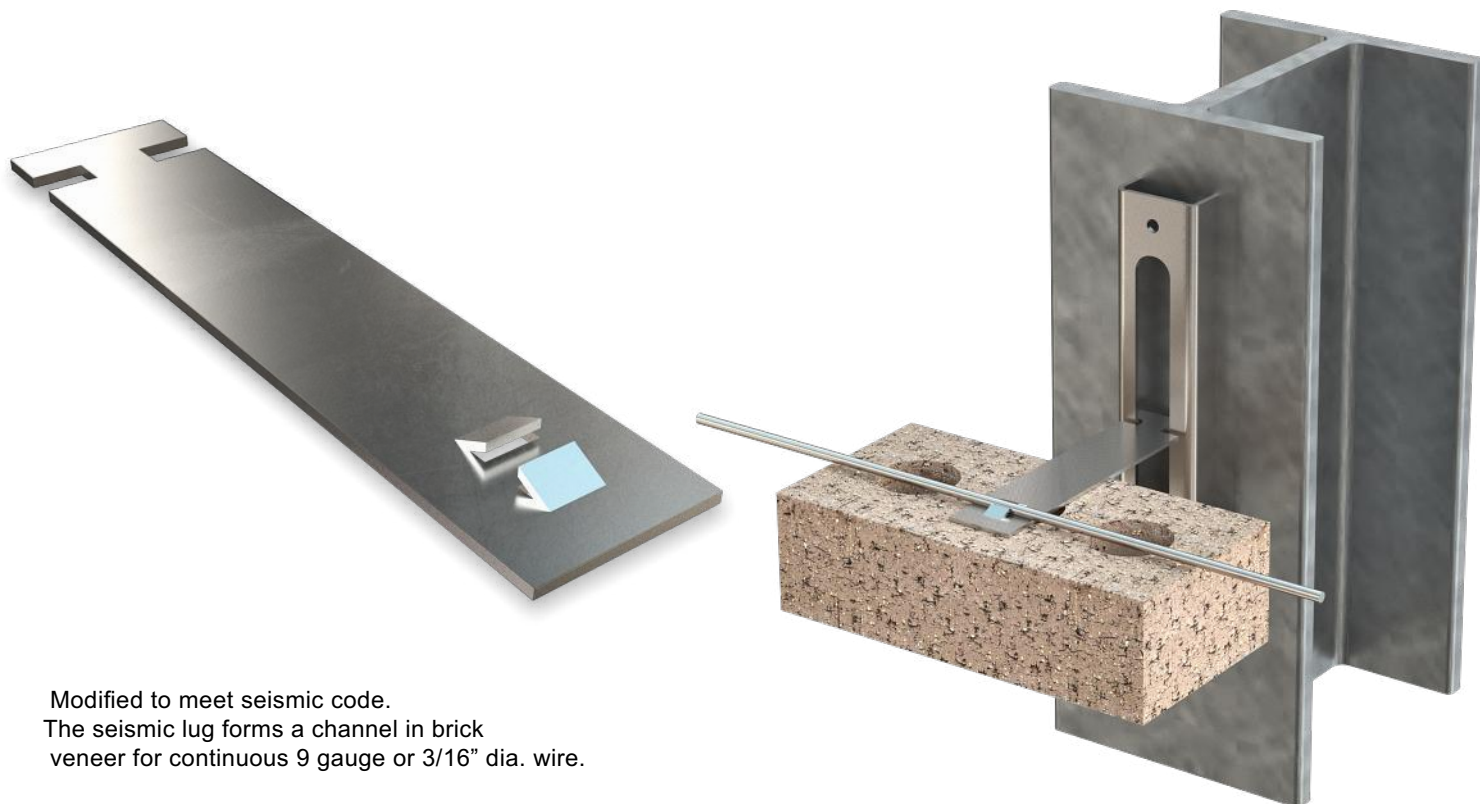

Modified to meet seismic code.
The seismic lug forms a channel in brick veneer for continuous 9 gauge or 3/16" dia. wire.

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

ASTM A82 / A82M - (Cold drawn steel wire)

Tensile Strength - 80,000 psi

Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

Recycled Content:

Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%



SIZES / FINISHES

1422: 1-1/4" wide standard

12 gauge

14 gauge

16 gauge

Lengths:

3-1/2"

4-1/2"

5-1/2"

Other _____

Straight & Cut Seismic Wire:

9 gauge

3/16"

FINISH:

Mill Galvanized

Hot Dip Galvanized

Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113