




PRODUCT SUBMITTAL

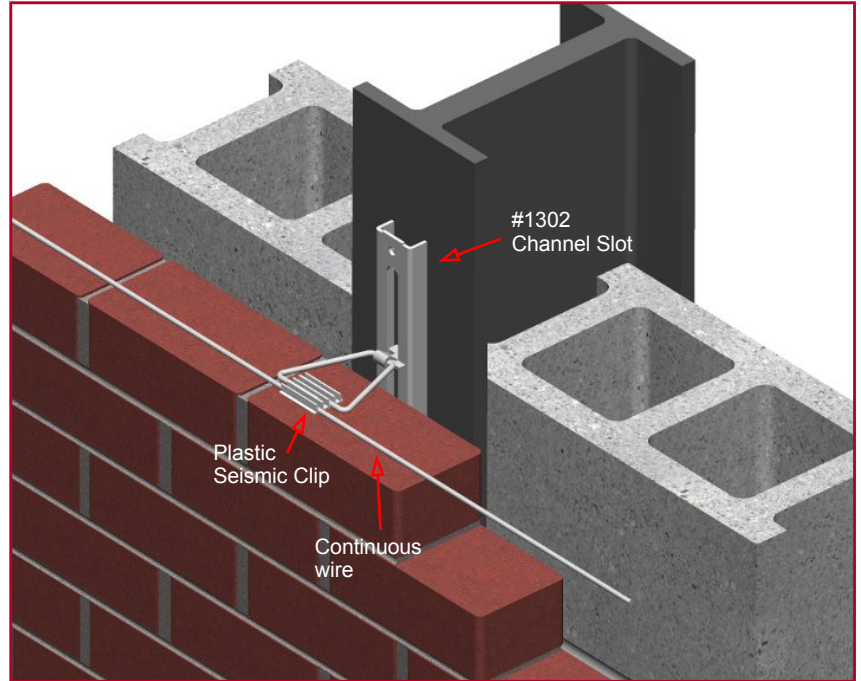

2103-O Channel Slot Offset Triangle

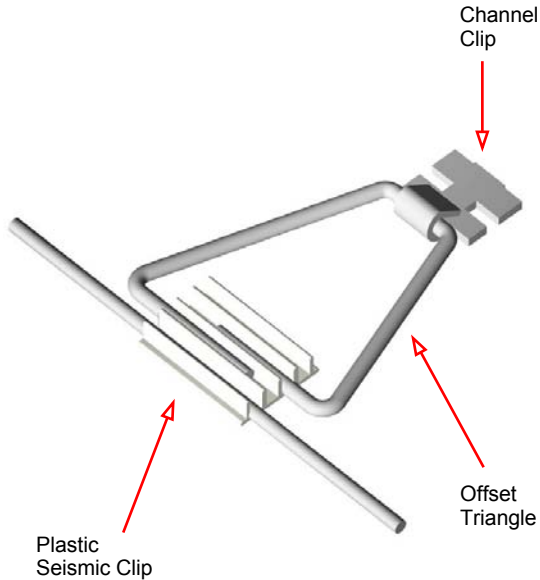

MATERIAL CONFORMANCE	SIZES / FINISHES	
ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi ACI / ASCE 530 - (Building code requirements for masonry structures) SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)	Offset Triangle Diameter: 3/16" 1/4" Channel Clip: 12 gauge Plastic Seismic Clip : 5/16" x 1-1/8" x 1-3/4" # 1302 Channel Slot: 12 gauge x 1-3/4" wide x 8" long Finishes: Mill Galvanized Hot Dip Galvanized Stainless Steel	Offset Triangle Size: 3" x 3" 6" x 6" 4" x 4" 7" x 7" 5" x 5" 7" x 9" Other _____ Straight & Cut Seismic Wire: 10'-0" Lengths 9 gauge 3/16" Ø
Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer, Stainless Steel, 60% Post Consumer V O C Content - 0%		

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113