


PRODUCT SUBMITTAL

WIRE-BOND

Polymer Coated 1500hr Screw

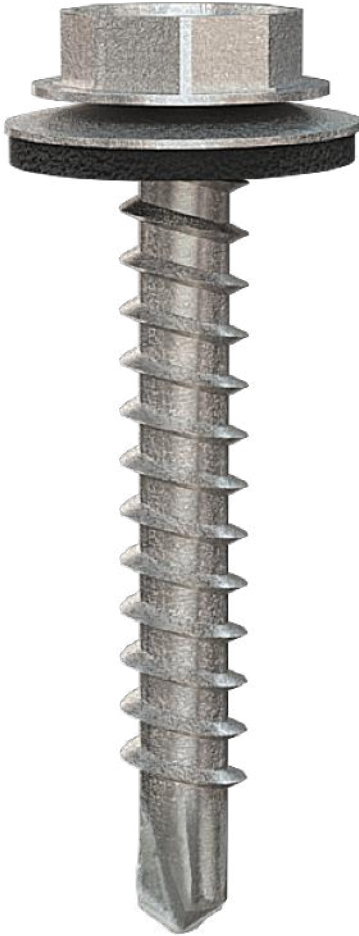

DESCRIPTION / MATERIAL CONFORMANCE

Polymer Screw:

- The maximum in corrosion resistant coatings.
- Average of 30 cycles of corrosion resistance.
- Provides long-term corrosion protection.
- Compatible with painted or metal surfaces.
- Out performs existing mechanical and electro-platings.
- Does not promote corrosion that can be caused by electro-chemical reaction between dissimilar metals.

ASTM - C954

Darco coating designed to sustain ASTM - B117 1500 hours

SIZES / FINISHES

Sizes:

#10 x 1-1/2"	#12 x 2"	#12 x 3"	#12 x 4"
#9 x 1-1/2"	1/4" x 5"		

9/16" EPDM Washer :	yes	no
---------------------	-----	----

Finish: Polymer Coated



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113