


# PRODUCT SUBMITTAL

WIRE-BOND

## # 2200 Dovetail Corrugated Tie

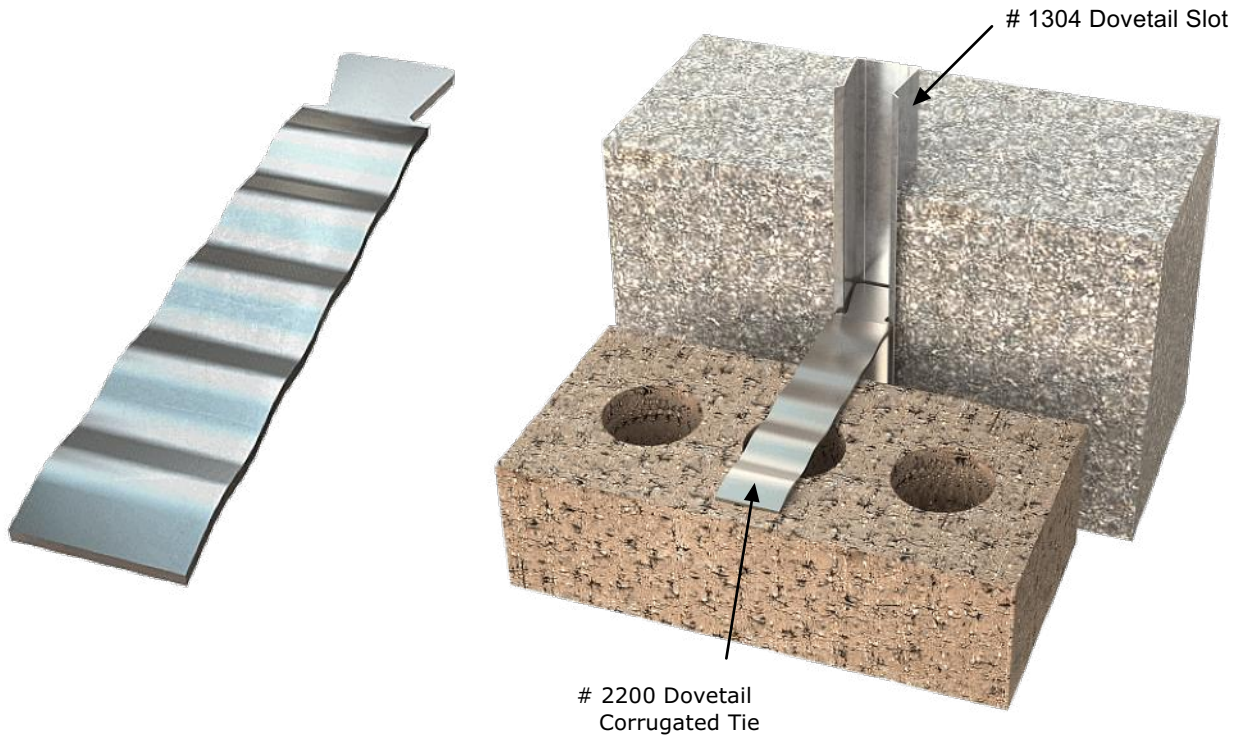

### MATERIAL CONFORMANCE

#### SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating **ASTM A153 / A153M-B2 (1.50 oz per sq ft)**

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

#### Recycled Content:

Mill Galvanized & Hot Dipped,  
82.8% Post-Consumer  
17% Post Industrial / Pre-Consumer,

Stainless Steel,  
60% Post Consumer  
V O C Content - 0%

### SIZES / FINISHES

**# 2200 Dovetail Corrugated Tie:** 1" wide standard

#### # 2200 Thickness:

12 gauge  14 gauge  16 gauge

#### # 2200 Length:

3-1/2"  5-1/2"  7-1/2"  Other \_\_\_\_\_

#### # 1304 Dovetail Slot:

22 gauge  24 gauge  26 gauge

#### # 1304 Standard Dimensions:

1" width x 10'-0" length foam filled

#### Finishes:

Mill Galvanized  Hot Dip  Stainless Steel



**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113