


PRODUCT SUBMITTAL

WIRE-BOND

2102 Dovetail Triangular Tie Seismic

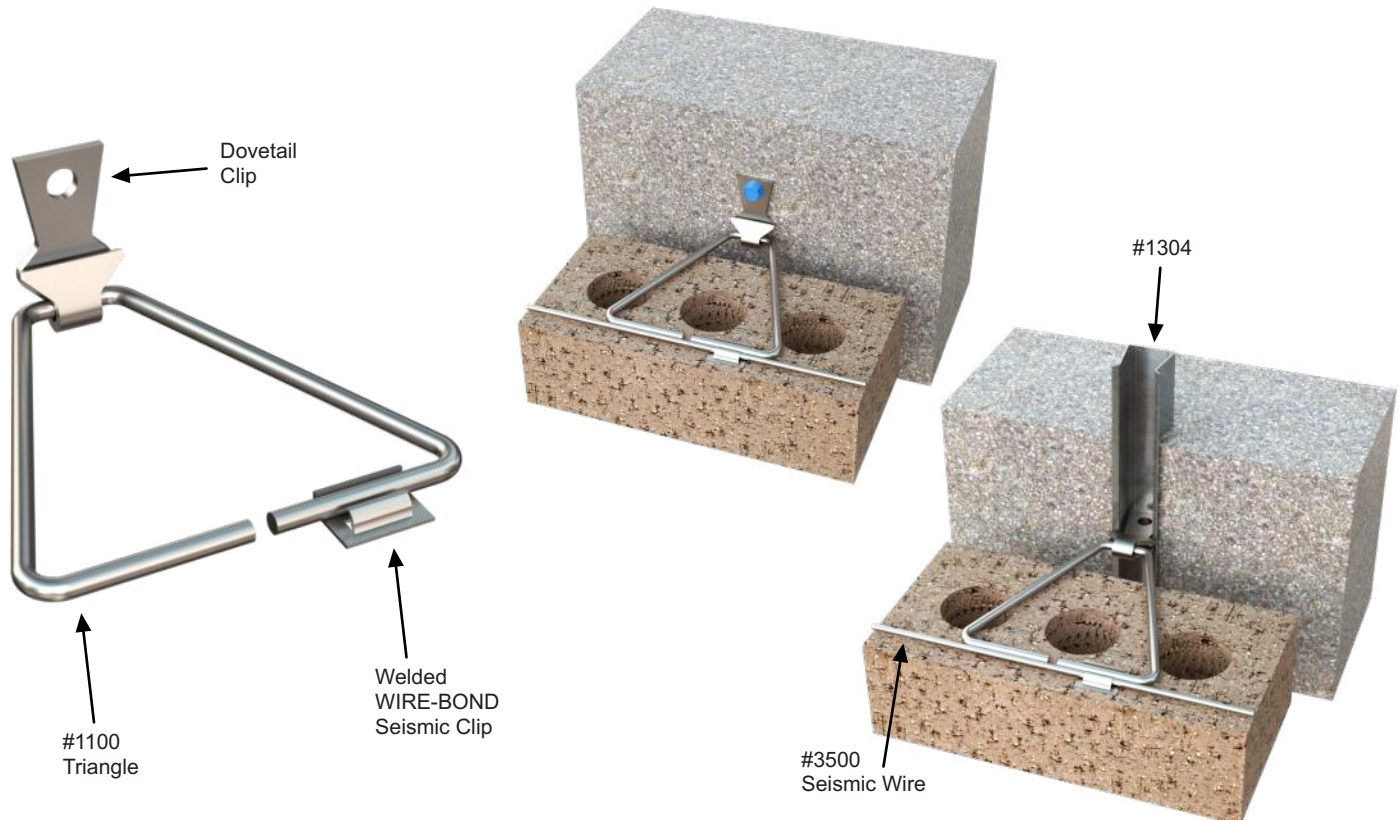

MATERIAL CONFORMANCE

ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire)
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**
Hot Dip Galvanized after fabrication / Zinc Coating

ASTM A153 / A153M-B2 (1.50 oz per sq ft)
Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:

Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%



SIZES / FINISHES

1100 Triangle Diameter: 3/16" dia. 1/4" dia.
1100 Triangle Size: 3" x 3" 6" x 6"

4" x 4" 7" x 7"
Dovetail Clip: 5" x 5" 7" x 9"

12ga x 1" with 5/16" Hole

Other _____

Finish:

Mill Galvanized Hot Dip Stainless Steel

1304 Dovetail Slot:

22 gauge 24 gauge 26 gauge

WIRE-BOND® clip :

16 gauge standard

Standard Dimensions:

1" width x 10'-0" length foam filled

Finish:

Mill Galvanized Hot Dip Stainless Steel

#3500 Straight & Cut Seismic Wire: 9 gauge 3/16"

FINISH: Hot Dip Galvanized Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113