




PRODUCT SUBMITTAL

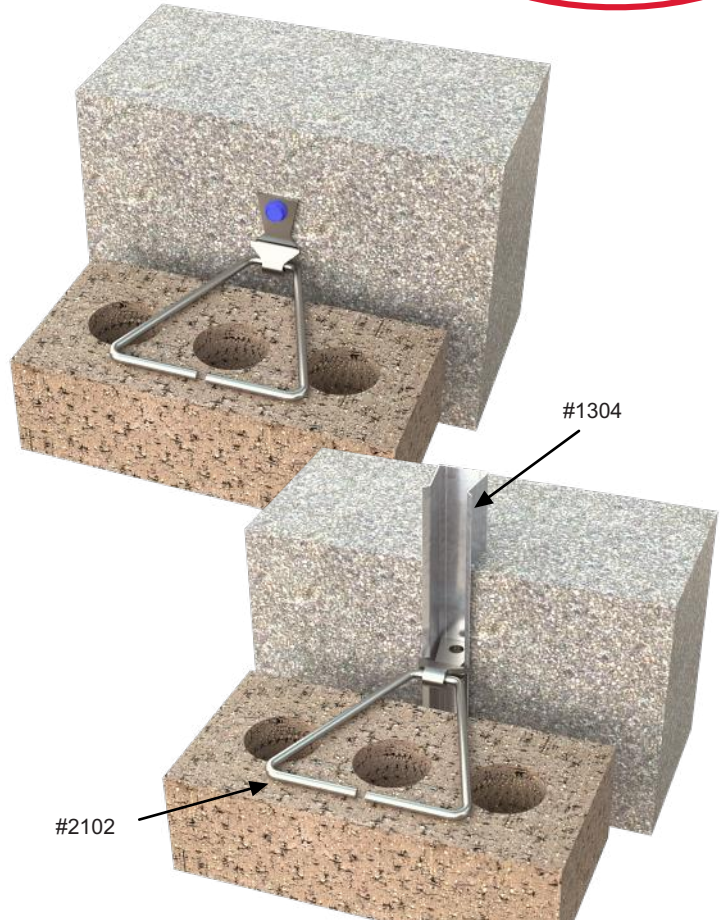

2102 Dovetail Triangular Tie

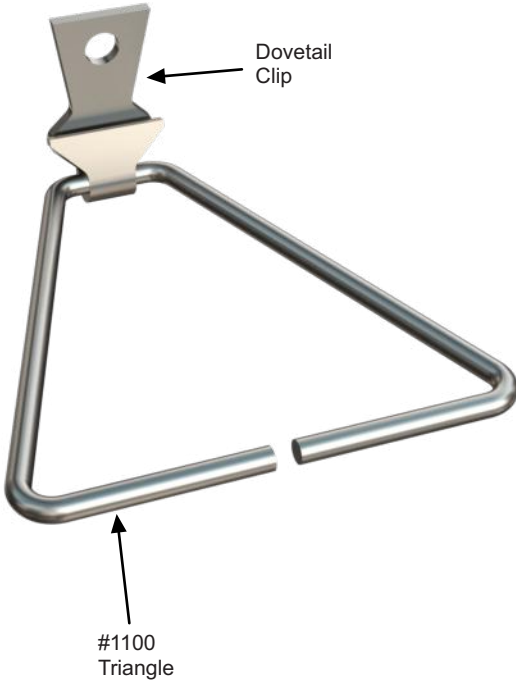

MATERIAL CONFORMANCE	SIZES / FINISHES		
SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304 (Type 316 available on special order) ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi ACI / ASCE 530 - (Building code requirements for masonry structures)	# 1100 Triangle Diameter: 3/16" dia. 1/4" dia.	# 1100 Triangle Size: 3" x 3" 6" x 6" 4" x 4" 7" x 7" 5" x 5" 7" x 9"	
Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer, Stainless Steel, 60% Post Consumer V O C Content - 0%	# Dovetail Clip: ■ 12ga x 1" with 5/16" Hole	Finish: Mill Galvanized Hot Dip Stainless Steel	
	# 1304 Dovetail Slot: 22 gauge 24 gauge 26 gauge	Standard Dimensions: 1" width x 10'-0" length foam filled	
	Finish: Mill Galvanized Hot Dip Stainless Steel		

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113