



PRODUCT SUBMITTAL

WIRE-BOND

Ladder Tee (For Single Wythe Wall)

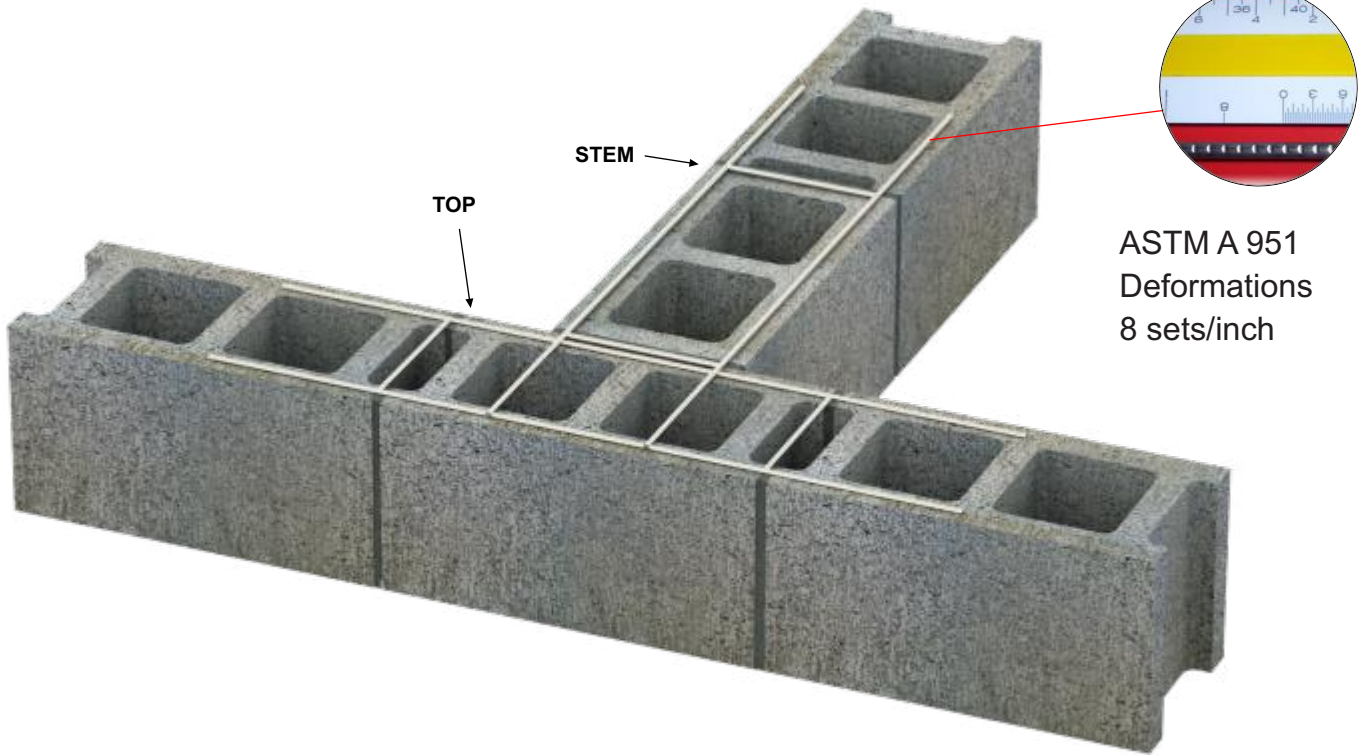

MATERIAL CONFORMANCE		SIZES / FINISHES																							
<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M</p> <p>Tensile Strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum</p> <p>ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 (Building Code Requirements for Masonry Structures)</p> <p>Mill Galvanized coating: ASTM A641/A641M (0.1 oz/ft)</p> <p>Hot-Dip Galvanized after fabrication: ASTM A153/A153M-B2 (1.5 oz/ft)</p> <p>Wire (Stainless Steel): ASTM A580/ASTM 580M - AISI Type 304 (Type 316 available on special orders)</p>		<p>WIRE SIZE:</p> <table border="0"> <tr> <td>Standard</td> <td>9 Gauge (.148 in)</td> <td colspan="2"></td> <td>CROSS RODS:</td> </tr> <tr> <td>Heavy Duty</td> <td>3/16 (.187 in)</td> <td colspan="2"></td> <td>9 Gauge</td> </tr> <tr> <td>Extra Heavy Duty</td> <td>3/16 (.187 in)</td> <td colspan="2"></td> <td>9 Gauge</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td>3/16</td> </tr> </table> <p>10' length standard, custom length available special order)</p>				Standard	9 Gauge (.148 in)			CROSS RODS:	Heavy Duty	3/16 (.187 in)			9 Gauge	Extra Heavy Duty	3/16 (.187 in)			9 Gauge					3/16
Standard	9 Gauge (.148 in)			CROSS RODS:																					
Heavy Duty	3/16 (.187 in)			9 Gauge																					
Extra Heavy Duty	3/16 (.187 in)			9 Gauge																					
				3/16																					
<p>Recycled Content: Mill Galvanized & Fot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p>Stainless Steel 97% Pre-Consumer V O C Content - 0%</p>		<p>TOP CMU SIZE:</p> <table border="0"> <tr> <td>4"</td> <td>6"</td> <td>8"</td> <td>10"</td> <td></td> </tr> <tr> <td>12"</td> <td>14"</td> <td>16"</td> <td>Other</td> <td></td> </tr> </table>				4"	6"	8"	10"		12"	14"	16"	Other											
4"	6"	8"	10"																						
12"	14"	16"	Other																						
<p></p>		<p>STEM CMU SIZE:</p> <table border="0"> <tr> <td>4"</td> <td>6"</td> <td>8"</td> <td>10"</td> <td></td> </tr> <tr> <td>12"</td> <td>14"</td> <td>16"</td> <td>Other</td> <td></td> </tr> </table>				4"	6"	8"	10"		12"	14"	16"	Other											
4"	6"	8"	10"																						
12"	14"	16"	Other																						
		<p>FINISHES:</p> <table border="0"> <tr> <td>Mill Galvanized</td> <td>Hot Dip Galvanized</td> <td>Stainless Steel</td> <td colspan="2"></td> </tr> </table>				Mill Galvanized	Hot Dip Galvanized	Stainless Steel																	
Mill Galvanized	Hot Dip Galvanized	Stainless Steel																							

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761



Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

www.wirebond.com

Mailing Address: P.O. Box 13124 Memphis, TN 38113