


PRODUCT SUBMITTAL

WIRE-BOND

Ladder Level-Eye (Hook & Eye Corner)

- Double eye is butt welded to side rod 16" O.C.
- Height of double eye will not exceed 3/16" in bed joint.
- Easier to maintain 3/8" mortar joint.

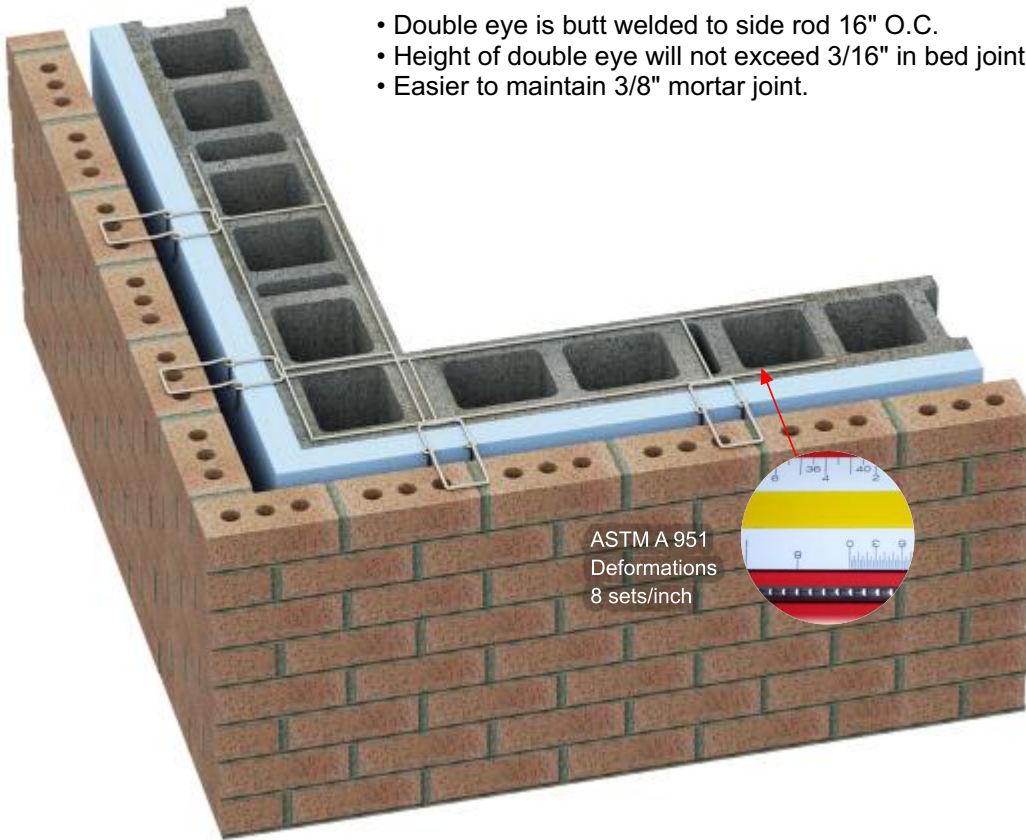

STRUCTURAL PERFORMANCE CHARACTERISTICS

Capable of withstanding 100 lbs load in tension and compression without deforming or developing play in excess of .05 inch.

16" O.C. cross rods allow core clearance.

3/16" diameter Hook & Eye



MATERIAL CONFORMANCE	SIZES / FINISHES														
<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M, ASTM A82/ A82M</p> <p>Tensile Strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum</p> <p>ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 (Building Code Requirements for Masonry Structures)</p> <p>Mill Galvanized coating: ASTM A641/A641M (0.1 oz/ft)</p> <p>Hot-Dip Galvanized after fabrication: ASTM A153/A153M-B2 (1.5 oz/ft)</p> <p>Wire (Stainless Steel): ASTM A580/ASTM 580M - AISI Type 304 (Type 316 available on special orders)</p>	<p>WIRE SIZE:</p> <table> <tr> <td>Standard</td> <td>9 Gauge (.148 in)</td> <td>CROSS RODS:</td> </tr> <tr> <td>Heavy Duty</td> <td>3/16 (.187 in)</td> <td>9 Gauge</td> </tr> <tr> <td>Extra Heavy Duty</td> <td>3/16 (.187 in)</td> <td>9 Gauge</td> </tr> <tr> <td></td> <td></td> <td>3/16</td> </tr> </table>			Standard	9 Gauge (.148 in)	CROSS RODS:	Heavy Duty	3/16 (.187 in)	9 Gauge	Extra Heavy Duty	3/16 (.187 in)	9 Gauge			3/16
Standard	9 Gauge (.148 in)	CROSS RODS:													
Heavy Duty	3/16 (.187 in)	9 Gauge													
Extra Heavy Duty	3/16 (.187 in)	9 Gauge													
		3/16													
<p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p>Stainless Steel 97% Pre-Consumer V O C Content - 0%</p>	<p>CMU SIZE:</p> <table> <tr> <td>4"</td> <td>6"</td> <td>8"</td> <td>10"</td> <td>12"</td> <td>14"</td> <td>16"</td> </tr> </table> <p>PINTLE: 3/16" dia. standard</p> <p>Length: 3-1/4" 4-1/4" 5-1/4" Other</p> <p>FINISHES:</p> <table> <tr> <td>Hot Dip Galvanized</td> <td>Stainless Steel</td> </tr> </table>			4"	6"	8"	10"	12"	14"	16"	Hot Dip Galvanized	Stainless Steel			
4"	6"	8"	10"	12"	14"	16"									
Hot Dip Galvanized	Stainless Steel														
	<p>** Please state overall wall size and cavity or insulation when ordering</p>														

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113