

# PRODUCT SUBMITTAL

WIRE-BOND

## PTA #4300 (Partition Top Anchor)


### PTA #4300

Average  
Shear Load:  
1,470 (lbs)



### PTA Tube

PTA tube with expansion filler is placed over the anchor to allow deflection. Joint is filled with mortar, fully surrounding the tube.

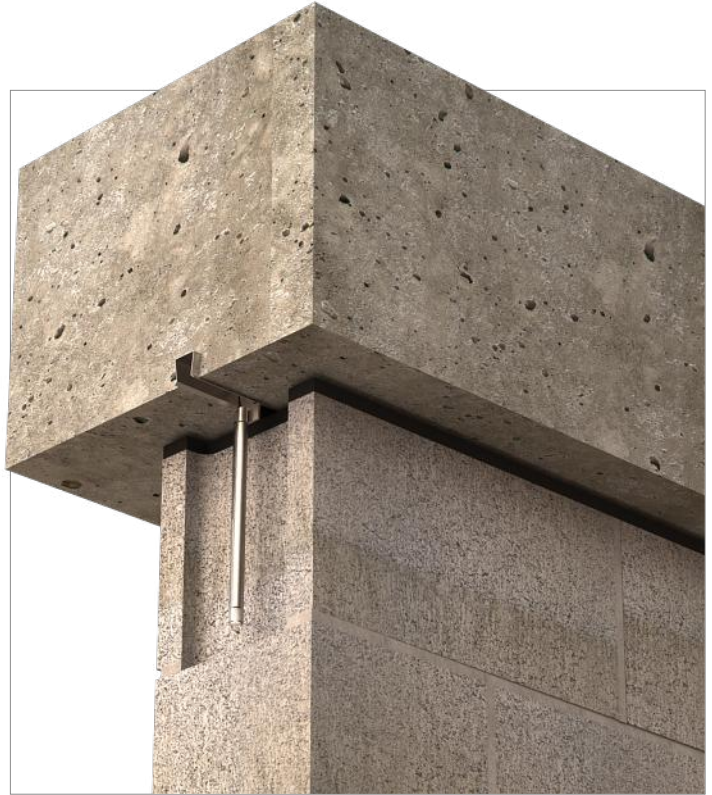

### MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M  
ROD: ASTM A82 / A82M

Hot Dip Galvanized after fabrication / Zinc Coating  
ASTM A153 / A153M-B2 (1.50 oz per sq ft)  
Stainless Steel ASTM 580 / ASTM 580M Type 304  
TUBE: Clear Butyrate ASTM D542 , D148 , D696 , D257

**Recycled Content:**  
Mill Galvanized & Hot Dipped,  
82.8% Post-Consumer  
17% Post Industrial / Pre-Consumer,

Stainless Steel,  
60% Post Consumer  
V O C Content - 0%



### SIZES / FINISHES

**#4300 Flat Dovetail:**  
12 gauge thick  
Fits into #1304 Dovetail Slot

**ROD:**  
 $\frac{3}{8}$ " x 7"

**PTA TUBE:**  
Fits over Rod

**FINISHES:** Hot Dip Galvanized Stainless Steel

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113