




# PRODUCT SUBMITTAL

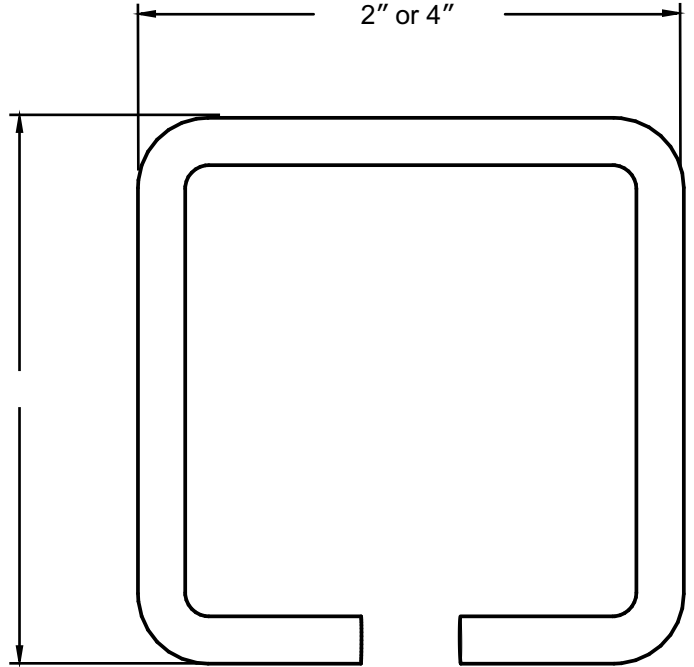

## # 1500 & 1501 Rectangular Tie

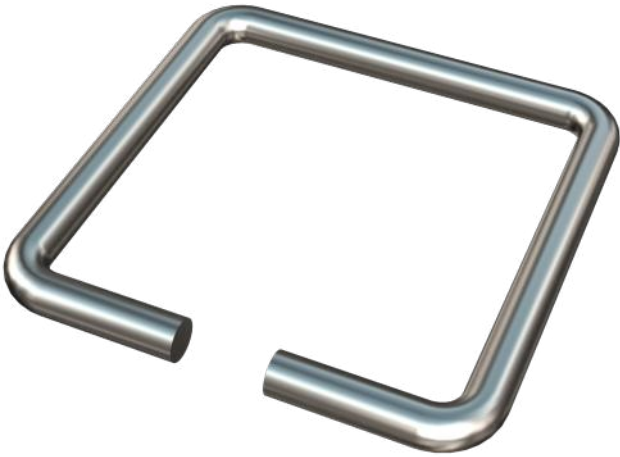

MATERIAL/CONFORMANCE	SIZES / FINISHES											
<p><b>ASTM A1064/A1064M, A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ASTM A951 / A951M-06</b> - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b> Hot Dip Galvanized after fabrication / Zinc Coating</p> <p><b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b> Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p> <p><b>WIRE Recycled Content:</b> Mill Galvanized &amp; Hot Dip, 82.8% Post-Consumer 17.0% Post Industrial / Pre - Consumer Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p><b># 1500 Rectangular Tie</b></p> <table border="0"> <tr> <td>2" wide</td> <td>3/16" diameter</td> <td>1/4" diameter</td> </tr> </table> <p><b># 1501 Rectangular Tie</b></p> <table border="0"> <tr> <td>4" wide</td> <td>3/16" diameter</td> <td>1/4" diameter</td> </tr> </table> <p><b>Finishes:</b></p> <table border="0"> <tr> <td>Mill Galvanized</td> <td>Hot Dip Galvanized</td> <td>Stainless Steel</td> </tr> </table>			2" wide	3/16" diameter	1/4" diameter	4" wide	3/16" diameter	1/4" diameter	Mill Galvanized	Hot Dip Galvanized	Stainless Steel
2" wide	3/16" diameter	1/4" diameter										
4" wide	3/16" diameter	1/4" diameter										
Mill Galvanized	Hot Dip Galvanized	Stainless Steel										

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113