



# PRODUCT SUBMITTAL

**WIRE-BOND**

## # 2522 Seismic Veneer Anchor Corrugated

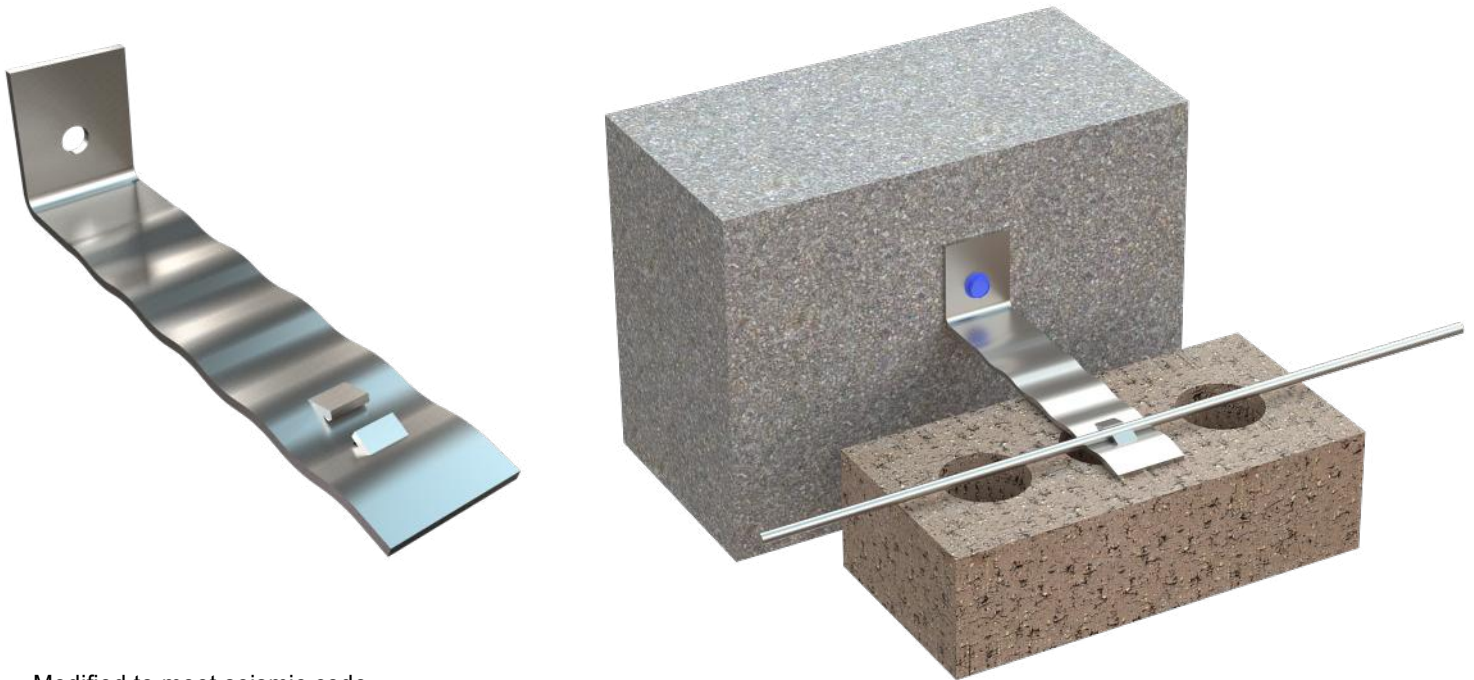

Modified to meet seismic code.  
The seismic lug forms a channel in brick veneer for continuous 9 gauge or 3/16" dia. wire.

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM A666, ASTM A480/480M, and ASTM A240/A240M - AISI Type 304</b></p> <p><b>ASTM A1064/A1064M ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p><b># 2522:</b> 1-1/4" wide standard</p> <p>12 gauge                  14 gauge                  16 gauge</p> <p><b>Lengths:</b></p> <p>3-1/2"                  4-1/2"                  5-1/2"</p> <p>Other _____</p> <p><b>Straight &amp; Cut Seismic Wire:</b></p> <p>9 gauge                  3/16"</p> <p><b>FINISH:</b></p> <p>Mill Galvanized Hot Dip Galvanized Stainless Steel</p>

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113