


PRODUCT SUBMITTAL




WIRE-BOND

2522 Seismic Veneer Anchor

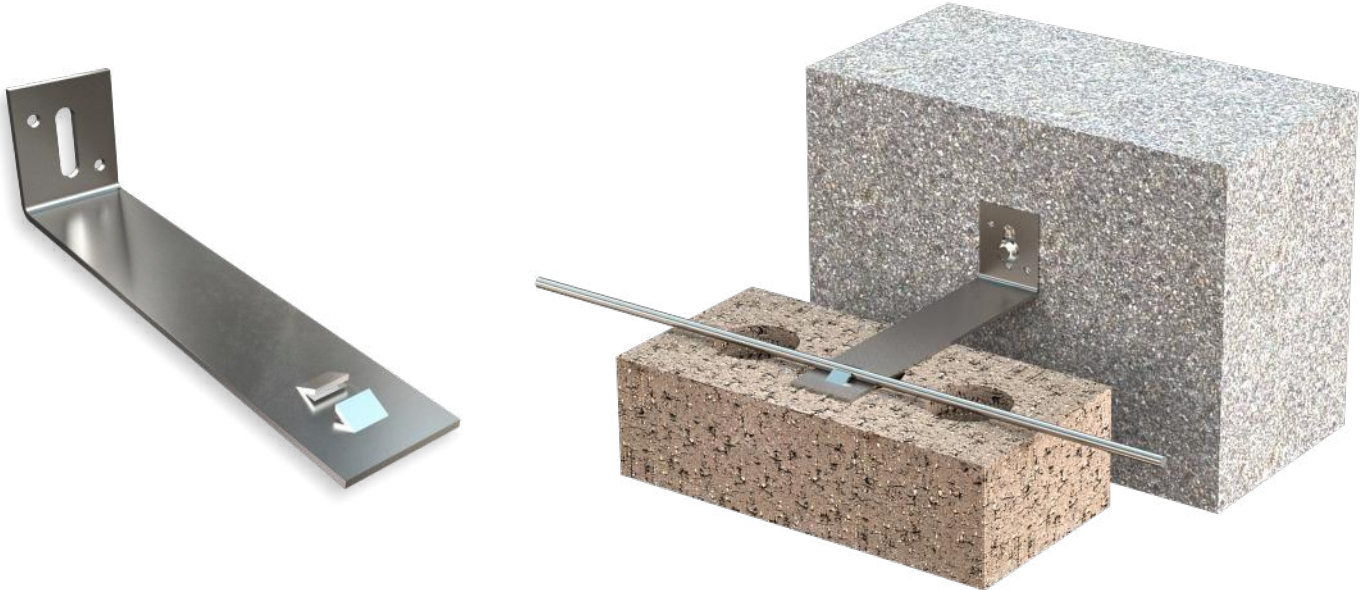

Modified to meet seismic code.
The seismic lug forms a channel in brick veneer for continuous 9 gauge or 3/16" dia. wire.

MATERIAL CONFORMANCE	SIZES / FINISHES		
<p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p># 2522: 1-1/4" wide standard</p> <p>12 gauge 14 gauge 16 gauge</p> <p>Lengths:</p> <p>3-1/2" 4-1/2" 5-1/2"</p> <p>Other _____</p> <p>Straight & Cut Seismic Wire:</p> <p>9 gauge 3/16"</p> <p>FINISH:</p> <p>Mill Galvanized Hot Dip Galvanized Stainless Steel</p>		

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113