


PRODUCT SUBMITTAL



SureTie WS Anchoring System Thermal Seismic (Metal)

"SureTie fasteners do not create any significant thermal bridging effects on the wall system."

Test Results Available Upon Request

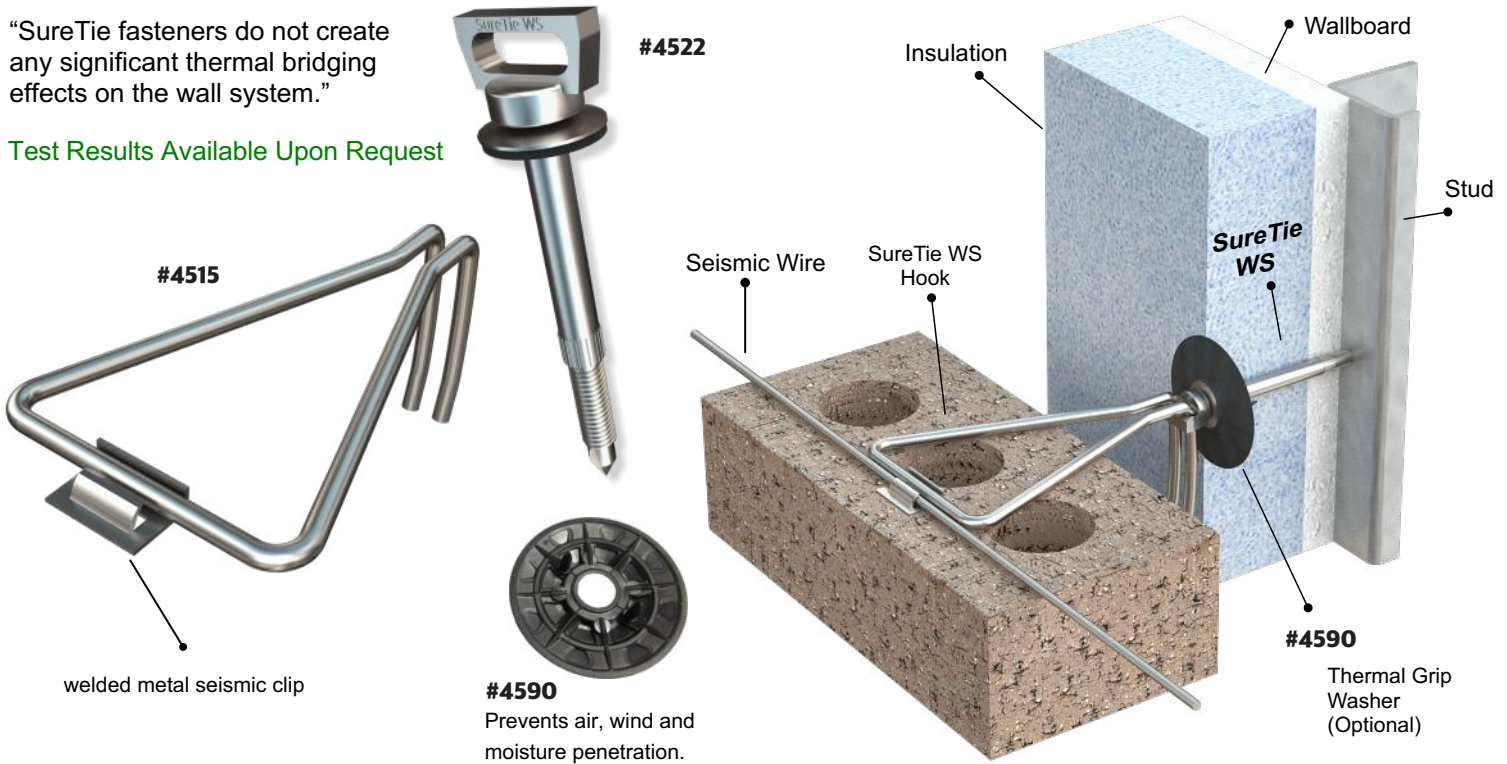

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p>	<p># 4522 SureTie WS Silver-gray climaseal finish resulted in 0% red rust at 1000 hours exposure to ASTM B-117 salt spray testing.</p> <p>Insulation: 1" 1-1/2" 2" 2-1/2" 3" 3-1/2" 4" 4-1/2"</p> <p>Wallboard: 5/8" 1/2"</p> <p>Straight & Cut seismic wire: 9 gauge 3/16"</p>
<p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p># 4515 SureTie Double Hook 3/16" dia. 3" 4" 5"</p> <p>#4590 Thermal Grip Washer 2" dia. washer with solid cap design (no keyholes) Pre-spotting prongs Stiffened center "Bullseye" ring prevents fastener pull-through Flexible perimeter compresses on surface and reduces tearing Flattens on surface of insulation</p>
<p>FINISH : (Sure Tie Hook) Mill Galvanized Hot Dip Galvanized Stainless Steel</p>	<p>WIRE-BOND® welded clip : 16 gauge standard</p>

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113