



PRODUCT SUBMITTAL

WIRE-BOND

1004X Type III X Screw On Veneer Anchor

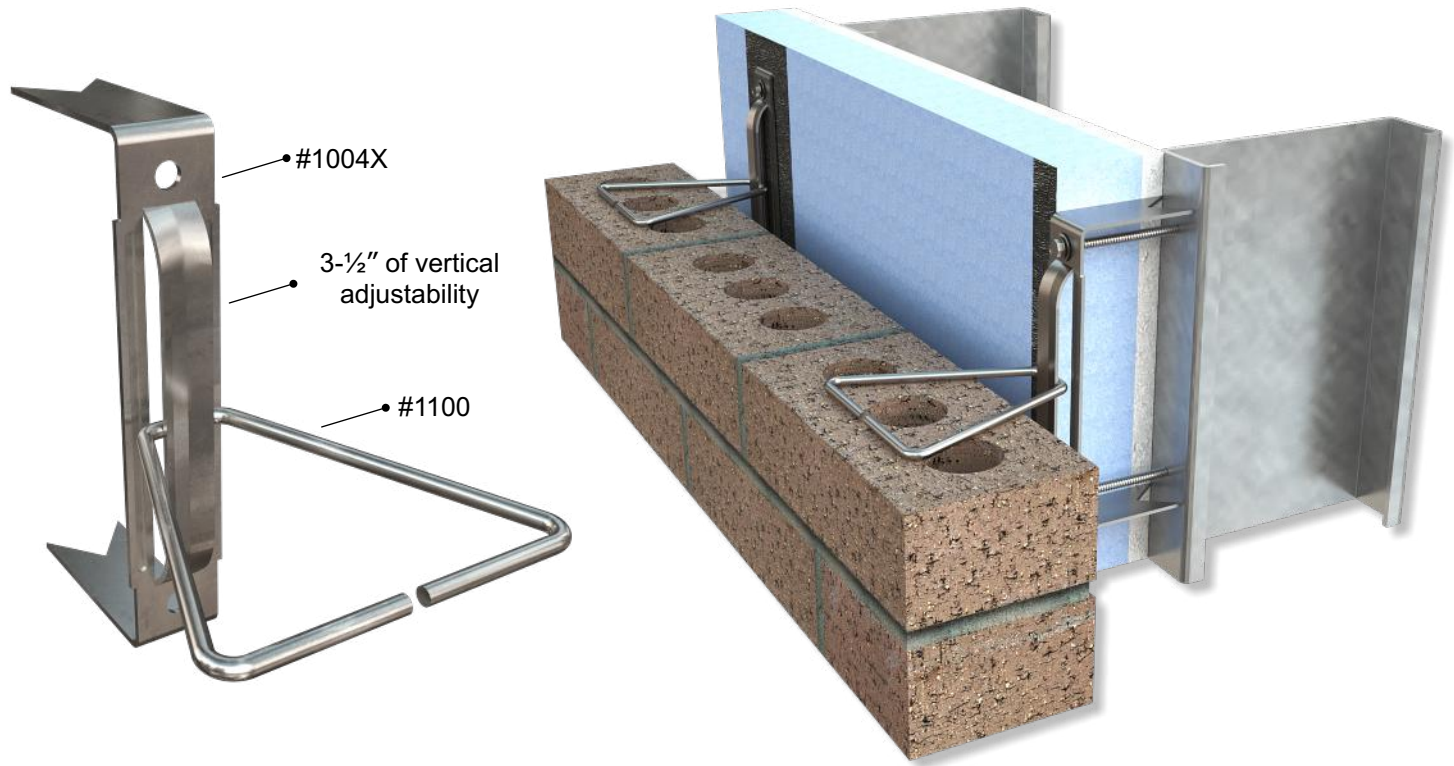

MATERIAL CONFORMANCE	SIZES / FINISHES
ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi	#1004X : 1-1/4" wide x 6" long
ACI / ASCE 530 - (Building code requirements for masonry structures)	14 gauge 12 gauge
SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M	(Prong length to accommodate insulation)
Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft)	For Gypsum sheathing: 5/8" 1/2"
Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)	Insulation: 1" 1 1/2" 2" 2 1/2"
Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)	3" 3 1/2" 4"
Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,	#1100 Triangle: 3/16" dia. 1/4" dia.
Stainless Steel, 60% Post Consumer V O C Content - 0%	Length: 3" 4" 5" 7" 9"
	Finish: Mill Galvanized Hot Dipped Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113