


PRODUCT SUBMITTAL







WIRE-BOND® Clip



Can be used in any adjustable system consisting of a pintle or triangle and horizontal joint reinforcing wire.

All WIRE-BOND® seismic products meet **Uniform Building Code requirements listed in 1403.6.4.2.** "In seismic zones A – F, wall ties shall have a lip or hook on the extended leg that will engage or enclose a horizontal joint reinforcement wire having a diameter of 0.148 inch (3.76mm) (No. 9 B.W. gauge) or equivalent. The joint reinforcement shall be continuous with butt splices between ties permitted."

Conforms to building code requirements for masonry structures (**ACI530-05/ASCES-05/TMS402-05**); **seismic performance categories A-F.**

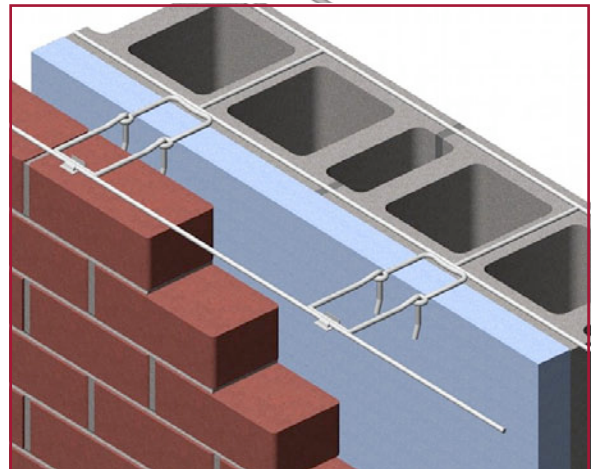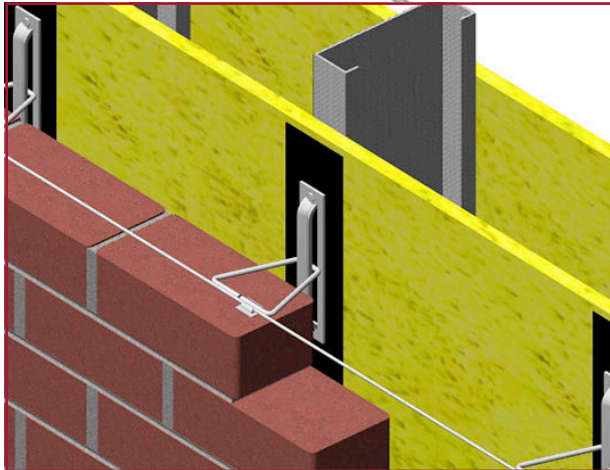

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:

Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

WIRE-BOND® clip :

16 gauge standard

Straight & Cut Seismic Wire

9 gauge 3/16"Ø

FINISH:

Hot Dip Galvanized Stainless Steel



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113