


PRODUCT SUBMITTAL

WIRE-BOND

2407 Adjustable Veneer Anchor

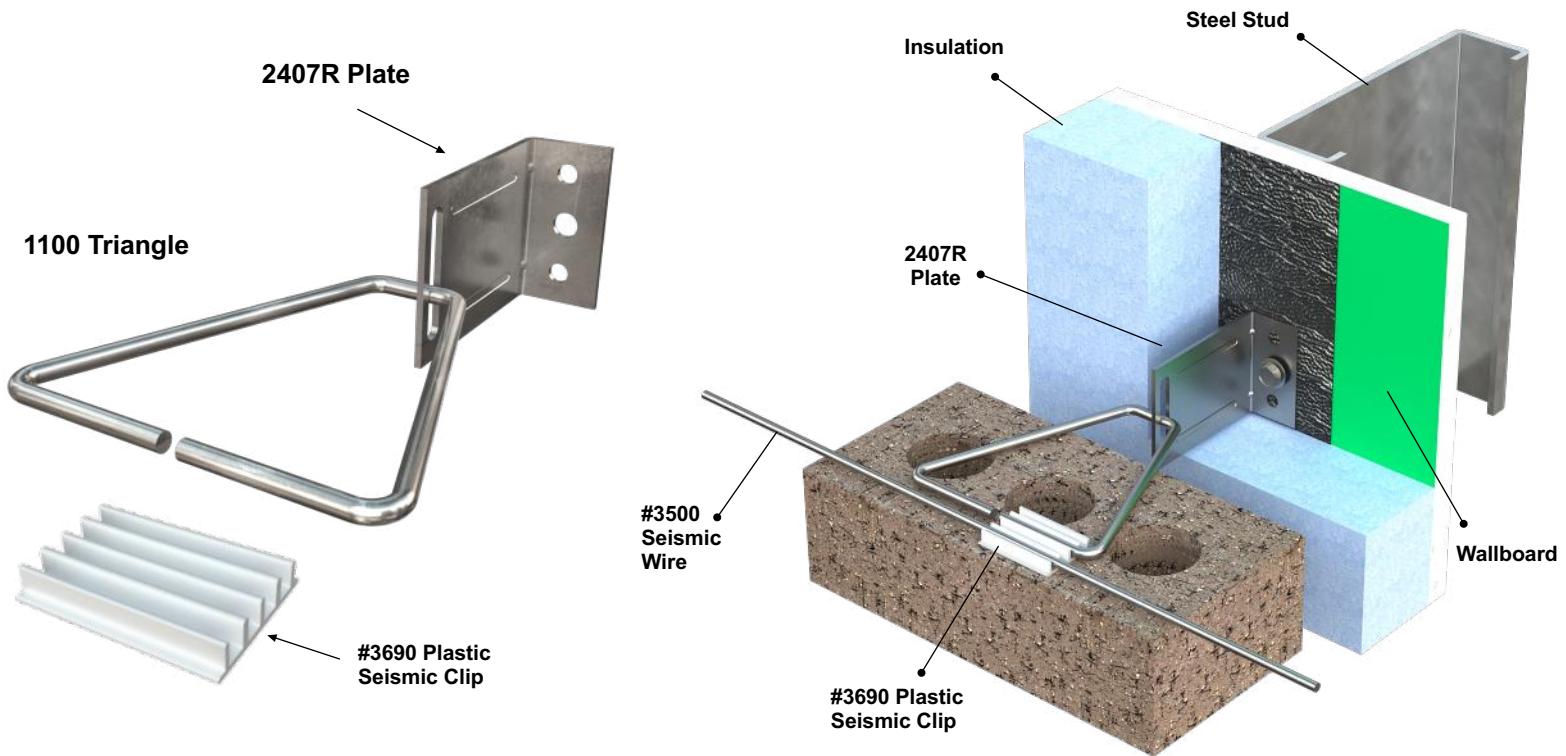

MATERIAL CONFORMANCE	SIZES / FINISHES		
ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order) ACI / ASCE 530 - (Building code requirements for masonry structures) SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M Stainless Steel ASTM A666, ASTM A480/A480M, and ASTM A167 Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer, Stainless Steel, 60% Post Consumer V O C Content - 0%	# 1100 Triangle Diameter: 3/16" dia. 1/4" dia.		
	# 1100 Triangle Size: 3" x 3" 6" x 6" 4" x 4" 7" x 7" 5" x 5" 7" x 9"		
	#3500 Straight & Cut seismic wire:	9 gauge	3/16"
	#3690 Plastic Seismic Clip : 5/16" x 1-1/2" x 3/4"		
	# 2407R Plate Length to accommodate insulation:		
	0" insulation	2" insulation	3-1/2" insulation
	1" insulation	2-1/2" insulation	4" insulation
	1-1/2" insulation	3" insulation	Other _____
	# 2407R Plate:	16 gauge	14 gauge 12 gauge
	Finish:	Hot Dip Galvanized	Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113