


# PRODUCT SUBMITTAL

## Copper Seal ( Copper Fabric Flashing ) #4140



### Asphalt Free

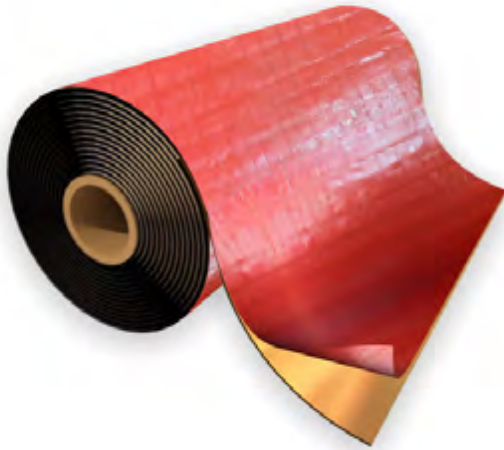


#### FEATURES:

- Compatible with building envelope air barriers, spray foam insulations and rigid board insulations.
- Clean and compatible - no asphalt or parting agents.
- Made of 90% recycled copper.
- Works in all temperatures (-25°F-125°F).
- Life of the wall warranty.
- Lighter weight allows longer 60-ft. rolls for fewer lap joints (40' for 7oz).
- Compatible with most caulks and sealants; no special flashing mastic needed, polyether sealants are recommended.

#### USES:

Foundation Sill Flashing, Cavity Wall Flashing, Parapet or Copings, Head and Sill Flashing.

COMPOSITION / MATERIALS	WEIGHT / SIZES
<p><b>Copper Fabric Flashing:</b></p> <ul style="list-style-type: none"><li>• Highest quality laminated copper flashing.</li><li>• 3, 5, or 7oz. copper sheet bonded with a rubber based adhesive between two layers of polymer fabric.</li></ul> <p>Copper Flashing is used in masonry construction because it does not react to any alkali or acids that may be found in mortar.</p> <p><b>ASTM B370</b></p> 	<p><b>Copper Weight / sq ft.</b></p> <p><input type="checkbox"/> 3 oz    <input type="checkbox"/> 5 oz    <input type="checkbox"/> 7 oz</p> <p><b>Sizes:</b> Standard roll widths:</p> <p><input type="checkbox"/> 12"    <input type="checkbox"/> 16"    <input type="checkbox"/> 18"    <input type="checkbox"/> 24"    <input type="checkbox"/> 36"</p> <p>Standard roll length:</p> <p>3 oz: 60 lineal feet. 5 oz: 60 lineal feet. 7 oz: 40 lineal feet.</p> <p>Use WireBond Flashing Mastic when needed to seal all laps and joints.</p>

Corporate Office: 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113