

PRODUCT SUBMITTAL

WIRE-BOND

#1304 Dovetail Slot





#1304 foam filled



With #2102
Dovetail
Triangular Tie



With #2222
Dovetail
Corrugated Tie

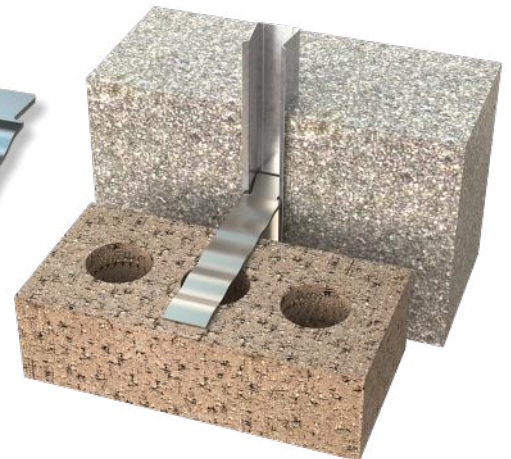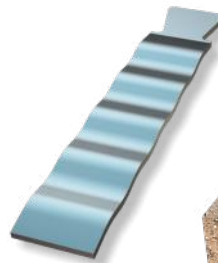

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**
Sheet Metal (Stainless Steel): ASTM A666, ASTM A480/480M, and
ASTM A240/A240M - AISI Type 304 or Type 316

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating **ASTM A153 / A153M-B2**
(1.50 oz per sq ft)

Recycled Content: Mill Galvanized & Hot Dipped,
 82.8% Post-Consumer
 17% Post Industrial / Pre-Consumer,

Stainless Steel,
 60% Post Consumer
 V O C Content - 0%

SIZES / FINISHES

1304 Dovetail Slot:

Gauge: 22 24 26

Standard Dimensions:
 1" width x 10'-0" length

FINISH: Mill Galvanized
 Hot Dip Galvanized
 Stainless Steel



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113