


# PRODUCT SUBMITTAL



## # 2102 Dovetail Triangular Tie

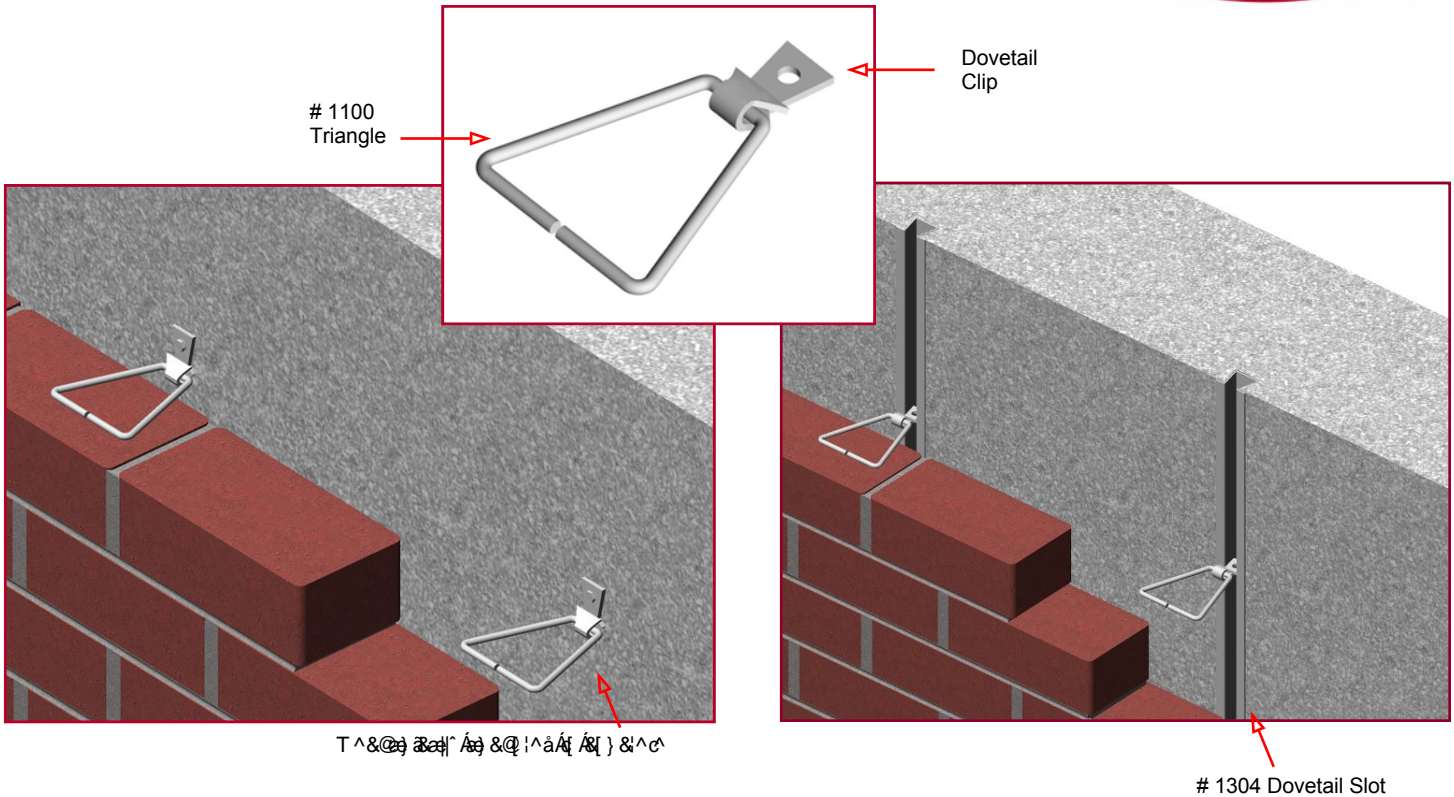

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel (WIRE) <b>ASTM A580 / ASTM A580M</b> Stainless Steel ( SHEET METAL) <b>ASTM A167 Type 304</b> (Type 316 available on special order)</p> <p><b>ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p>	<p><b># 1100 Triangle Diameter:</b></p> <p><input type="checkbox"/> 3/16" dia.   <input type="checkbox"/> 1/4" dia.</p> <p><b># Dovetail Clip:</b></p> <p><input checked="" type="checkbox"/> 12ga x 1" with 5/16" Hole</p> <p><b>Finish:</b></p> <p><input type="checkbox"/> Mill Galvanized   <input type="checkbox"/> Hot Dip   <input type="checkbox"/> Stainless Steel</p> <p><b># 1304 Dovetail Slot:</b></p> <p><input type="checkbox"/> 22 gauge   <input type="checkbox"/> 24 gauge   <input type="checkbox"/> 26 gauge</p> <p><b>Standard Dimensions:</b></p> <p>1" width x 10'-0" length foam filled</p> <p><b>Finish:</b></p> <p><input type="checkbox"/> Mill Galvanized   <input type="checkbox"/> Hot Dip   <input type="checkbox"/> Stainless Steel</p>
<p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	



**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113