


PRODUCT SUBMITTAL




Series 200 Ladder Mesh (4 Wire System)

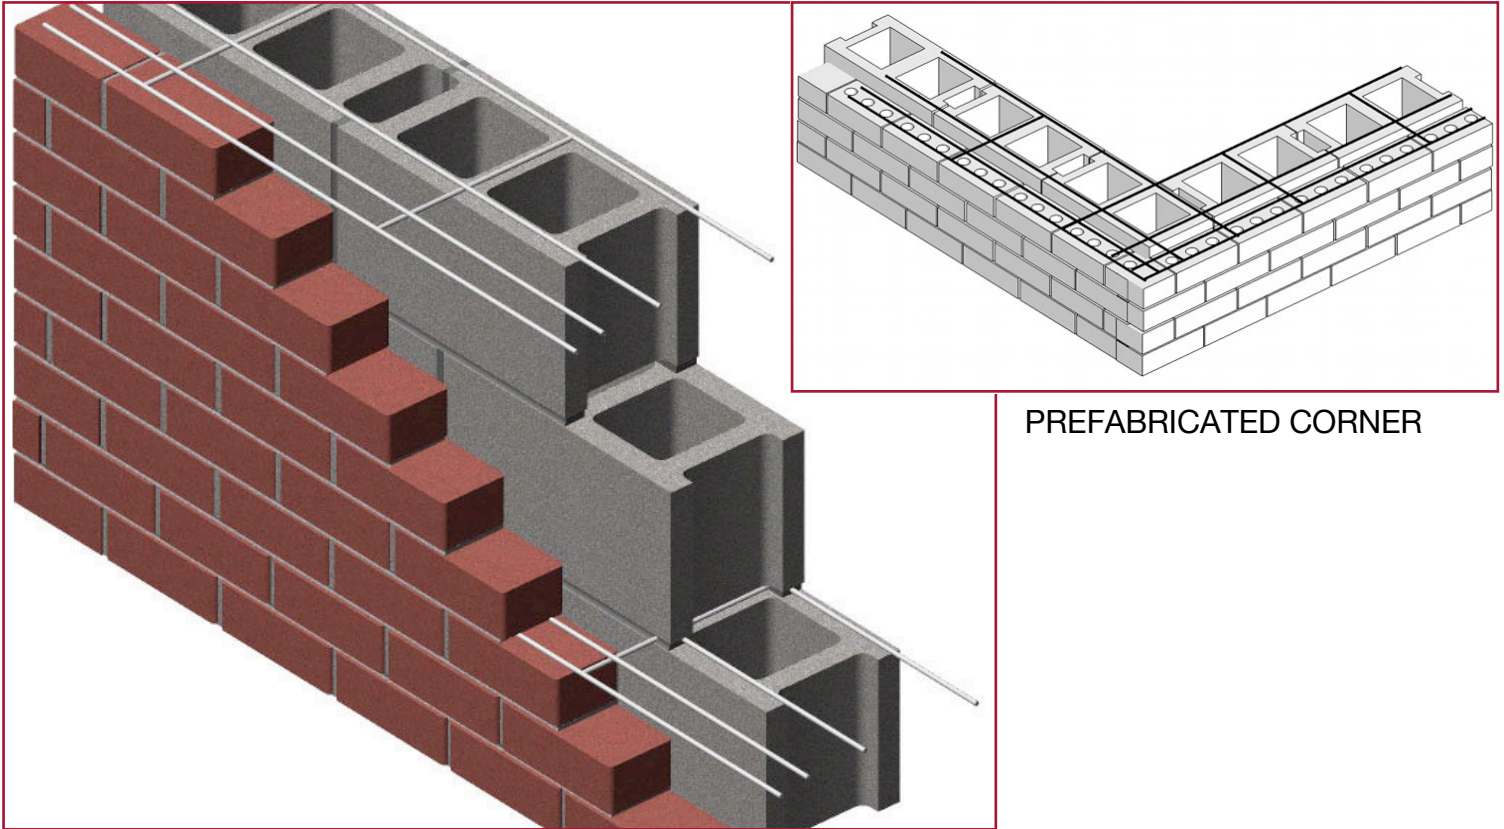

PREFABRICATED CORNER

16" O.C. cross rods allow core clearance.

MATERIAL CONFORMANCE	SIZES / FINISHES								
<p>ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, J I % P I A E O [] • { ^ } V O C Content - 0%</p> 	WIRE SIZE:			Side Rods		Cross Rods			
	Standard	9 Gauge (.148 in)	9 Gauge	Standard	9 Gauge (.148 in)	9 Gauge	Standard	9 Gauge (.148 in)	9 Gauge
	Heavy Duty	3/16" (.187 in)	9 Gauge	Heavy Duty	3/16" (.187 in)	9 Gauge	Heavy Duty	3/16" (.187 in)	9 Gauge
	Extra Heavy Duty	3/16" (.187 in)	3/16"	Extra Heavy Duty	3/16" (.187 in)	3/16"	Extra Heavy Duty	3/16" (.187 in)	3/16"
	CMU SIZE:								
	4"	6"	8"	10"	12"	14"	16"	18"	
	FINISHES:								
	Mill Galvanized	Hot Dip Galvanized	Stainless Steel	Mill Galvanized	Hot Dip Galvanized	Stainless Steel	Mill Galvanized	Hot Dip Galvanized	
	Please state overall wall size when ordering								

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113