


PRODUCT SUBMITTAL



Series 400 Ladder Fixed Tab

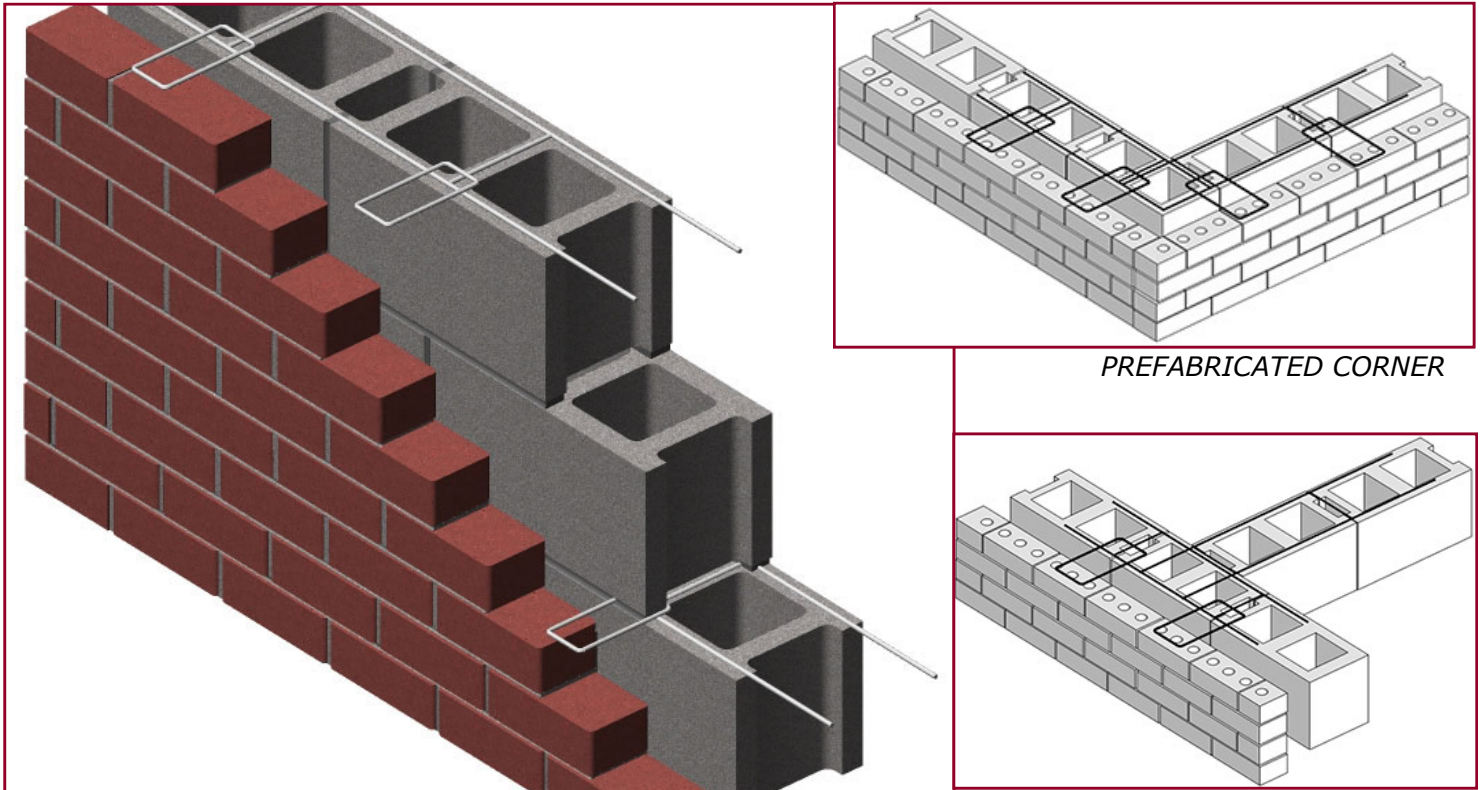

PREFABRICATED CORNER

PREFABRICATED TEE

16" O.C. cross rods allow core clearance.

Wall Tie is welded 16" O.C.
3 point weld.



3/16" dia. Wall Tie

MATERIAL CONFORMANCE	SIZES / FINISHES												
<p>ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, J1 % P; ^ E [] • { ^ ! V O C Content - 0%</p>	<p><input type="checkbox"/> Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft)</p> <p><input type="checkbox"/> Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A 153 - B2 (1.50 oz per sq ft)</p> <p><input type="checkbox"/> Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <table border="0"> <thead> <tr> <th>WIRE SIZE:</th> <th>Side Rods</th> <th>Cross Rods</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> Standard</td> <td>9 Gauge (.148 in)</td> <td>9 Gauge</td> </tr> <tr> <td><input type="checkbox"/> Heavy Duty</td> <td>3/16" (.187 in)</td> <td>9 Gauge</td> </tr> <tr> <td><input type="checkbox"/> Extra Heavy Duty</td> <td>3/16" (.187 in)</td> <td>3/16"</td> </tr> </tbody> </table>	WIRE SIZE:	Side Rods	Cross Rods	<input type="checkbox"/> Standard	9 Gauge (.148 in)	9 Gauge	<input type="checkbox"/> Heavy Duty	3/16" (.187 in)	9 Gauge	<input type="checkbox"/> Extra Heavy Duty	3/16" (.187 in)	3/16"
WIRE SIZE:	Side Rods	Cross Rods											
<input type="checkbox"/> Standard	9 Gauge (.148 in)	9 Gauge											
<input type="checkbox"/> Heavy Duty	3/16" (.187 in)	9 Gauge											
<input type="checkbox"/> Extra Heavy Duty	3/16" (.187 in)	3/16"											



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113