


PRODUCT SUBMITTAL

WIRE-BOND

2401 RJ-711 Seismic (Metal Clip)

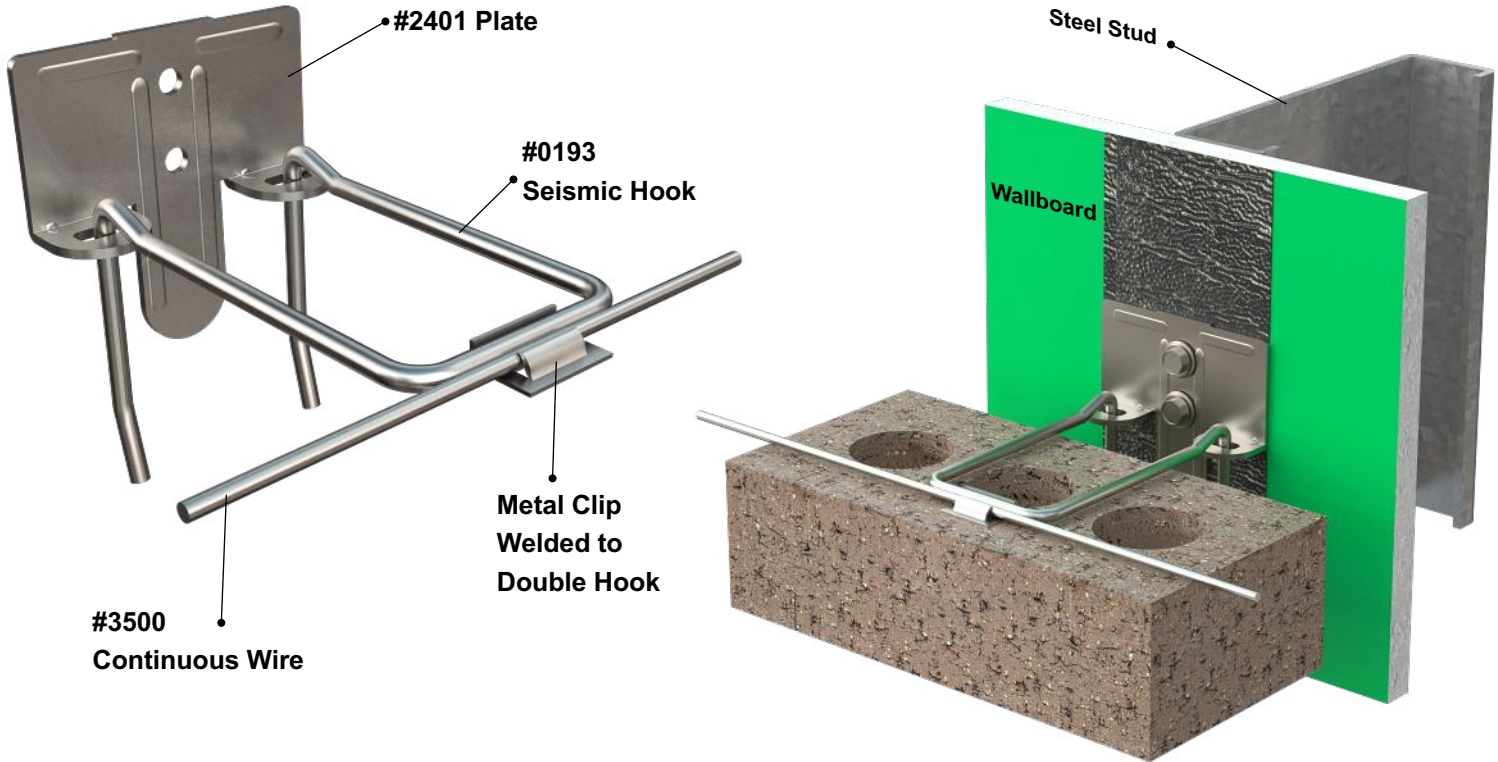

MATERIAL CONFORMANCE

ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire)
 Tensile Strength - 80,000 psi
 Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**
 Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**
 Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:
 Mill Galvanized & Hot Dipped,
 82.8% Post-Consumer
 17% Post Industrial / Pre-Consumer,

Stainless Steel,
 60% Post Consumer
 V O C Content - 0%



SIZES / FINISHES

2401 RJ711:
 14 gauge 12 gauge

#0193 Seismic Hook: 3/16" Diameter Standard
 3-1/4" 4-1/4" 5-1/4" Other

Continuous Wire:
 9gauge 3/16" dia.

FINISH:
 Mill Galvanized Hot Dip Galvanized Stainless Steel



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113