


# PRODUCT SUBMITTAL


WIRE-BOND


## # 4210 Termination Bar

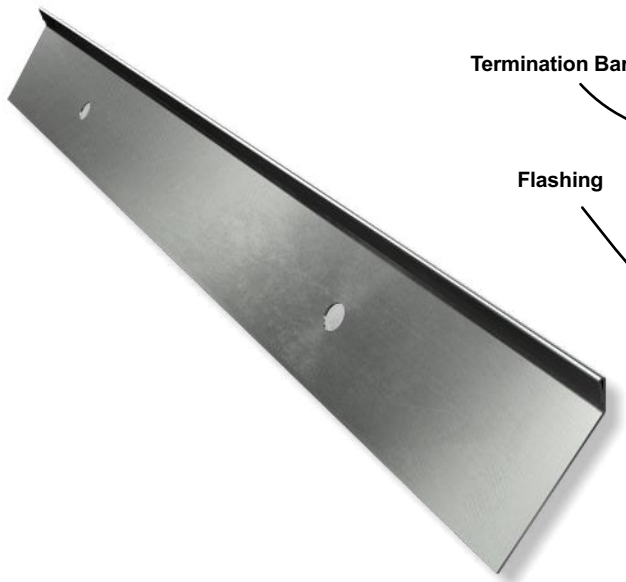

Termination Bar

Flashing

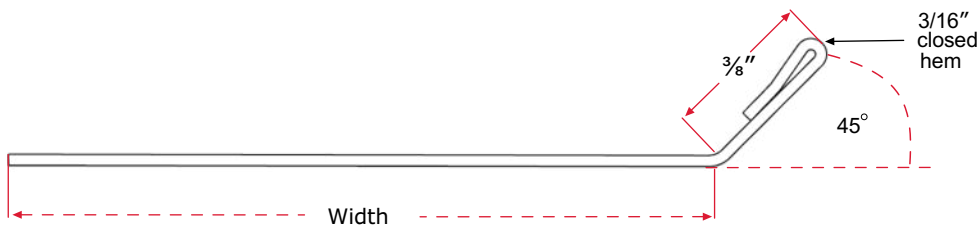

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>SHEET METAL:</b></p> <p>Stainless Steel Type 304: <b>ASTM A240/A240M, ASTM 666, ASTM A480/A480M and ASTM A167</b> (Type 316 available on special orders)</p> <p>Aluminum: <b>ASTM B221 / ASTM B221M</b></p>  <p><b>Steel Products (flats) Recycled Content:</b>                      Stainless Steel, 60% Post Consumer                      Aluminum 18% average (10% - 25% Range) Post Consumer                      56% average (25% - 75% Range) Pre Consumer</p> <p>V O C Content - 0%</p>	<p><b>#4210 Termination Bar:</b></p> <p><b>Stainless Steel:</b> 26 gauge x 1-1/2" wide by 8' sections</p> <p><b>Aluminum:</b> 14 gauge x 1" wide by 10' sections</p> <p><b>Both have a 3/8" 45° lip with a 3/16" closed hem and 5/16" Slotted holes: 8" O.C.</b></p>

Corporate Office: 400 Rountree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

[www.wirebond.com](http://www.wirebond.com)

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113