
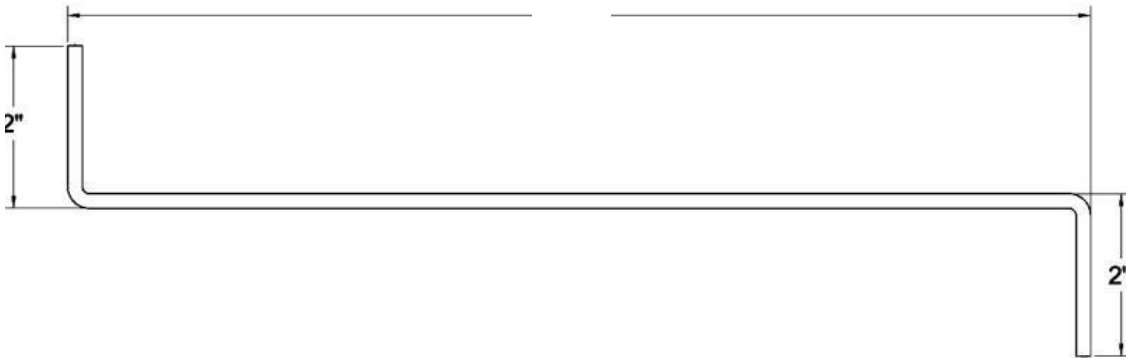



PRODUCT SUBMITTAL

WIRE-BOND

1600 Z Wire Tie

Tying masonry to masonry (Composite Wall Only)
 Not used in walls with air space and or insulation.
 CMU cells must be fully grouted.

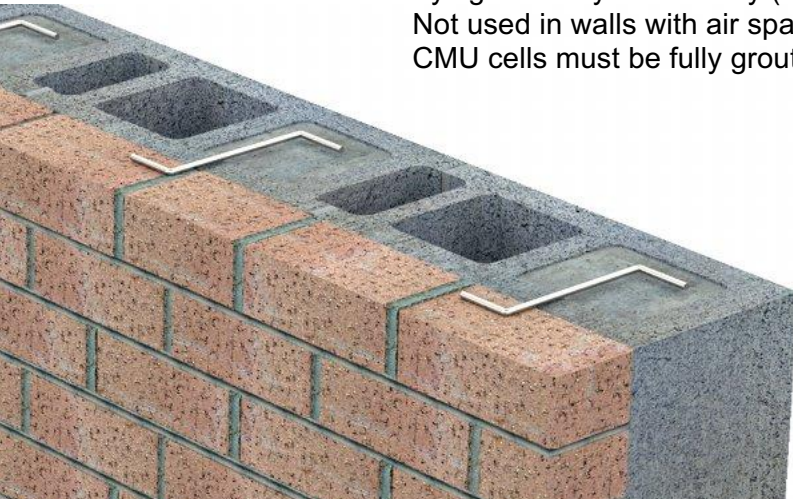

MATERIAL CONFORMANCE	SIZES / FINISHES		
<p>ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>WIRE Recycled Content: Mill Galvanized & Hot Dip, 82.8% Post-Consumer 17.0% Post Industrial / Pre - Consumer Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p># 1600 Diameter:</p> <p>3/16" 1/4"</p>	<p># 1600 Length:</p> <p>6" 8" 10" 12" Other</p>	
	<p>Finishes:</p> <p>Mill Galvanized Hot Dip Galvanized Stainless Steel</p>		

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113