



PRODUCT SUBMITTAL



2102 Dovetail Triangular Tie Seismic

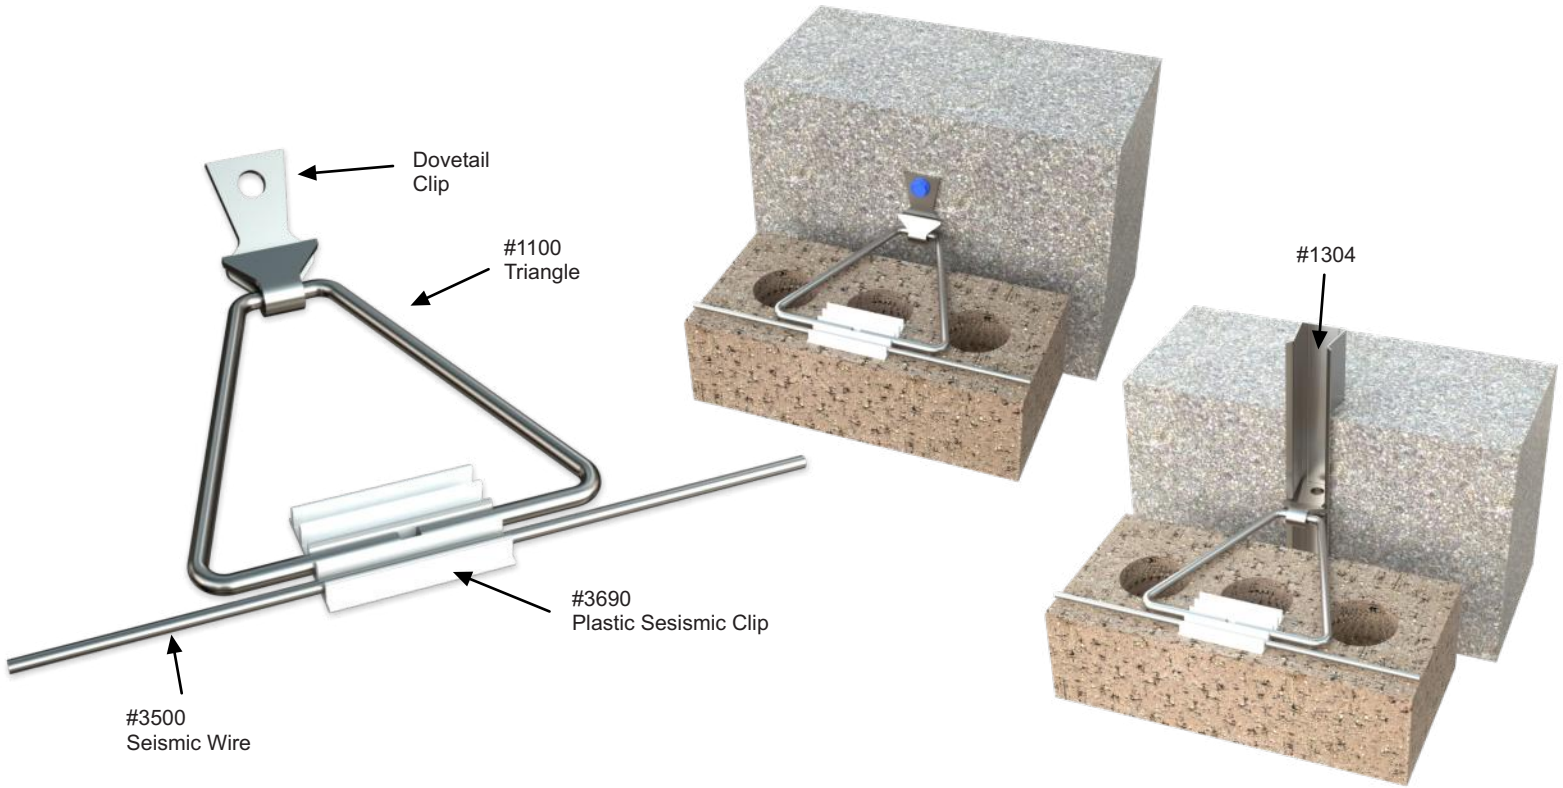

MATERIAL CONFORMANCE	SIZES / FINISHES																													
<p>ASTM A1064/A1064M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p># 1100 Triangle Diameter:</p> <table border="0"> <tr> <td>3/16" dia.</td> <td>1/4" dia.</td> <td># 1100 Triangle Size:</td> <td></td> </tr> <tr> <td></td> <td></td> <td>3" x 3"</td> <td>6" x 6"</td> </tr> <tr> <td></td> <td></td> <td>4" x 4"</td> <td>7" x 7"</td> </tr> </table> <p># Dovetail Clip:</p> <table border="0"> <tr> <td>12ga x 1" with 5/16" Hole</td> <td>5" x 5"</td> <td>7" x 9"</td> </tr> </table> <p>Finish:</p> <table border="0"> <tr> <td>Mill Galvanized</td> <td>Hot Dip</td> <td>Stainless Steel</td> </tr> </table> <p># 1304 Dovetail Slot:</p> <table border="0"> <tr> <td>22 gauge</td> <td>24 gauge</td> <td>26 gauge</td> <td>#3690 ASTM D1784</td> </tr> </table> <p>Standard Dimensions: 1" width x 10'-0" length foam filled</p> <p>Finish:</p> <table border="0"> <tr> <td>Mill Galvanized</td> <td>Hot Dip</td> <td>Stainless Steel</td> </tr> </table> <p>#3500 Straight & Cut Seismic Wire:</p> <table border="0"> <tr> <td>9 gauge</td> <td>3/16"</td> </tr> </table> <p>FINISH:</p> <table border="0"> <tr> <td>Hot Dip Galvanized</td> <td>Stainless Steel</td> </tr> </table>	3/16" dia.	1/4" dia.	# 1100 Triangle Size:				3" x 3"	6" x 6"			4" x 4"	7" x 7"	12ga x 1" with 5/16" Hole	5" x 5"	7" x 9"	Mill Galvanized	Hot Dip	Stainless Steel	22 gauge	24 gauge	26 gauge	#3690 ASTM D1784	Mill Galvanized	Hot Dip	Stainless Steel	9 gauge	3/16"	Hot Dip Galvanized	Stainless Steel
3/16" dia.	1/4" dia.	# 1100 Triangle Size:																												
		3" x 3"	6" x 6"																											
		4" x 4"	7" x 7"																											
12ga x 1" with 5/16" Hole	5" x 5"	7" x 9"																												
Mill Galvanized	Hot Dip	Stainless Steel																												
22 gauge	24 gauge	26 gauge	#3690 ASTM D1784																											
Mill Galvanized	Hot Dip	Stainless Steel																												
9 gauge	3/16"																													
Hot Dip Galvanized	Stainless Steel																													

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113