
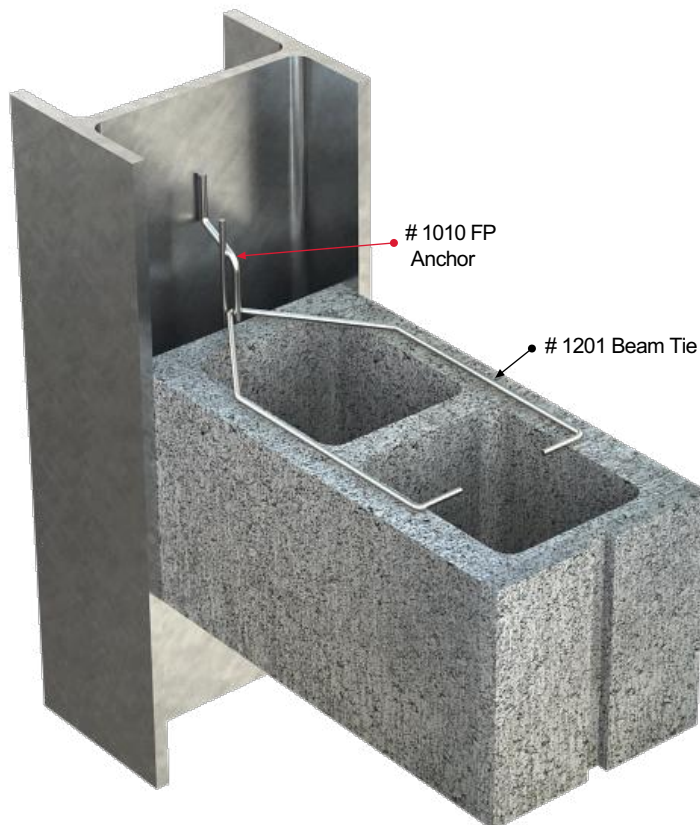


PRODUCT SUBMITTAL

WIRE-BOND

1010 Fire - Proofing Anchor

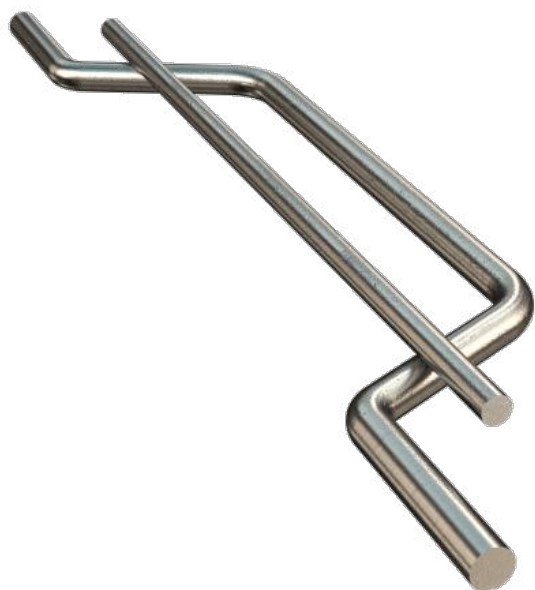

MATERIAL CONFORMANCE

ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire)
 Tensile Strength - 80,000 psi
 Yield Point - 70,000 psi
ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)
ACI / ASCE 530 - (Building code requirements for masonry structures
 Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**
 Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)
 Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:
 Mill Galvanized & Hot Dipped,
 82.8% Post-Consumer
 17% Post Industrial / Pre-Consumer,

Stainless Steel,
 60% Post Consumer
 V O C Content - 0%



SIZES / FINISHES

1010 Fire Proofing Anchor:

1/4" x 9

Offset varies depending on thickness of fire-proofing:

Fire Proofing Thickness:

1" 1-1/2" 2" 2-1/2" 3" other _____

FINISH:

Mill Galvanized Hot Dip Galvanized Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
 TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113

www.wirebond.com